


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Not previously established.

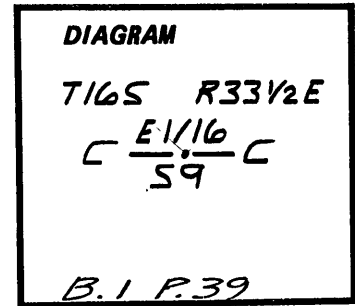

G-12

Description of corner evidence found:

None.

N-S-W wire fence corner bears North 42°30' East, 126.0 feet.

Description of monument and accessories I established to perpetuate the original location of this corner:

At calculated position as determined by traverse swing tie, set a 2 1/2 inch O.D. x 30 inch long aluminum pipe 24 inches in ground with 3 1/4 inch aluminum cap marked as shown:

Marked 2 new bearing trees:


a 12" dbh Lodgepole Pine bears South 35° West, 66.0 ft., scribed "CE1/16S9BT";

a 9" dbh Lodgepole Pine bears South 38° East, 234.0 ft., scribed "CE1/16S9BT".

Nailed brass washer marked "AS&E LS 1026" in lower blaze.

Raised a mound of stone 2 foot diameter base to top.

Painted a 6" red band and faces red and nailed signs 54-3 and 54-9 on all BT's. Set steel post with sign 54-9 6 feet North of and facing corner and sign 54-2 and set steel post with sign 54-2 6 feet South of corner.



Magnetic
Declination
20°E

I hereby certify the above corner monument was established as herein described on September 20, 1983.

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 28 day of Dec, 1983
Robert O. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)

