


CORNER RESTORATION

CORNER 9,10,15,&16 TWP 16S RANGE 33½E

ORIGINAL SURVEY BY: Henry W. Cooke

CONTRACT NUMBER: 494

CONTRACT DATE: January 16, 1884

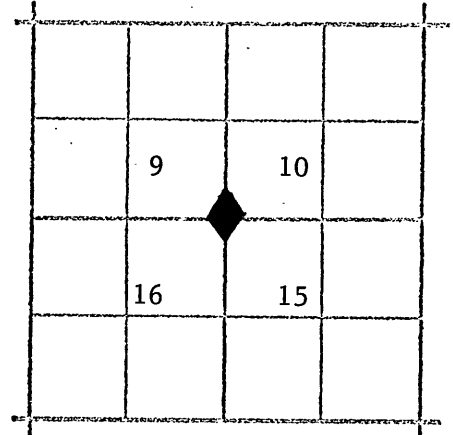

ORIGINAL DESCRIPTION: 80 ch. set a basalt stone 16"x12"x10", 11" in ground for cor. to sec. 9, 10, 15, and 16, marked with 4 notches on south and 3 notches on east edges from which a pine 12" dia. bears N 38°E 145 lks. dist. marked T16S R33½E S 10 B.T. A pine 12" dia. bears S 45°E 32 lks. dist. marked T16S R33½E S 15 B.T. A pine 14" dia. bears S 78°W 110 lks. dist. marked T16S R 33½ S 16 B.T. A pine 10" dia. bears N 64°W 54 lks. dist. marked T16S R33½E S 9 B.T.

RESTORATION BY, STAMP AND DATE:

REGISTERED
OREGON
LAND SURVEYOR

JULY 12, 1968
DOUGLAS M. FERGUSON
848

November 26, 1969


EVIDENCE FOUND: Found original B.T. 18" lodgepole pine dead and decaying marked T16S R33½E S 10 B.T. and original B.T. laying on ground near its broken-off stump marked T16S R33½E S 15 B.T. Fence corner bears S 34°E 19' from corner location.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var. Located section corner from bearings and intersecting dist. as shown on G.L.O. notes for bearing trees found. Set 2½' x 1½" zinc coated pipe with brass cap marked as shown 2' in ground with rock mound to top of pipe from which new B.T. are set. A lodgepole pine 18" dia. bears N 32°E 46.4' dist. marked T16S R33½E S 10 B.T. A lodgepole pine 12" dia. bears S 51°E 60.0' dist. marked T16S R33½E S 15 B.T. A lodgepole pine 12" dia. bears S 28°W 28.6' dist. marked T16S R33½E S 16 B.T. A lodgepole pine 12" dia. bears N 33°W 74' dist. marked T16S R33½E S 9 B.T. Using Leupold Staff Compass with 20° declination set off to east as checked by solar observation.

Complete and File with Office of the Grant
County Surveyor, Grant County, Oregon,
Courthouse, Canyon City, Oregon 97820

MONUMENT MARKED

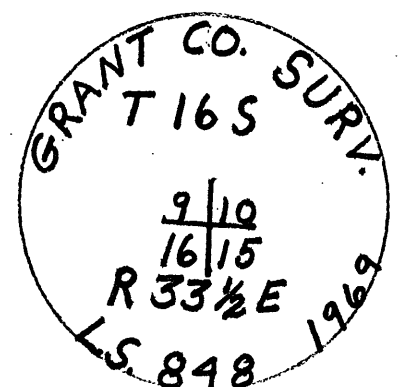

* SEE ARMSTRONG 12/83

J-13