

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Corner established by Henry W. Cooke under General Land Office Contract No. 494 dated January 16, 1884.

Surveyor General's records state:

North between secs 15 & 16 va 19 3/4°E.

80.00 Set a basalt stone 16x12x10 ins 11 ins in ground for cor to secs 9, 10, 15 & 16 marked with 4 notches on S. and 3 notches on E. edges from which a pine 12 ins dia bears N38°E 145 lks dist marked T16SR331/2ES10BT
a pine 12 ins dia bears S45°E 32 lks dist marked T16SR331/2ES15BT
a pine 14 ins dia bears S78°W 110 lks dist marked T16SR331/2ES16BT
a pine 10 ins dia bears N64°W 54 lks dist marked T16SR331/2ES9BT

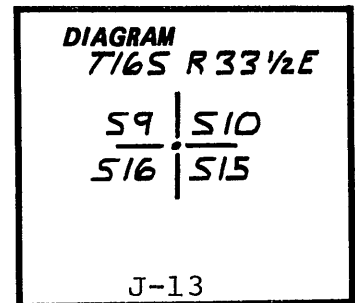

Description of corner evidence found:

Found a Grant County Surveyor 2 1/2" diameter brass cap monument on 1 1/2" zinc coated pipe 4 inches above ground in 2 1/2 foot diameter stone mound marked as shown below.

Found all 4 bearing trees as marked by LS 848 in 1969. The NW, NE, & SE bearing trees are all dead and standing, the SW bearing tree is alive but in poor condition and will not survive:

a 12" dbh Lodgepole Pine bears South 51° East, 60.5 ft., scribed "T16SR331/2ES15BT";
a 13" dbh Lodgepole Pine bears South 28° West, 29.0 ft., scribed "T16SR331/2ES16BT";
a 13" dbh Lodgepole Pine bears North 32° West, 74.4 ft., scribed "T16SR331/2ES9BT";
a 16" dbh Lodgepole Pine bears North 32° East, 46.9 ft., scribed "T16SR331/2ES10BT".

Description of monument and accessories established to perpetuate the original location of this corner:

Accepted monument by LS 848 as corner, a Grant County Surveyor brass cap monument 4 inches above ground in 2 1/2 foot diameter stone mound marked as shown:


Marked 4 new bearing trees:

a 5" dbh Lodgepole Pine bears South 42°30' East, 3.7 ft., scribed "XBT";
a 5" dbh Lodgepole Pine bears South 25° West, 14.3 ft., scribed "XBT";
a 7" dbh Lodgepole Pine bears North 36° West, 41.9 ft., scribed "T16SR331/2ES9BT";
a 5" dbh Lodgepole Pine bears North 31° East, 33.0 ft., scribed "XBT".

Nailed brass washer marked "AS&E LS 1026" in lower blaze of new bearing trees.

Painted 6 inch red band and faces red and nailed signs 54-3 and 54-4 on all bearing trees. Set 6 foot steel fence post 6 feet West of cap with signs 54-2 and 54-4. An existing steel fence post with sign 54-2 was found 1 1/2 feet South of cap.

I hereby certify the above corner monument was re-established as herein described on September 21, 1983.



Magnetic Declination 20°E

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office for record on the 28 day of Dec, 1983
Robert D. Paget by David B. Armstrong
(COUNTY OFFICIAL) (DEPUTY)

