


CORNER RESTORATION

1/4 CORNER 17 and 16 TWP 16S RANGE 33½E

ORIGINAL SURVEY BY: Henry W. Cooke

CONTRACT NUMBER: 494

CONTRACT DATE: January 16, 1884

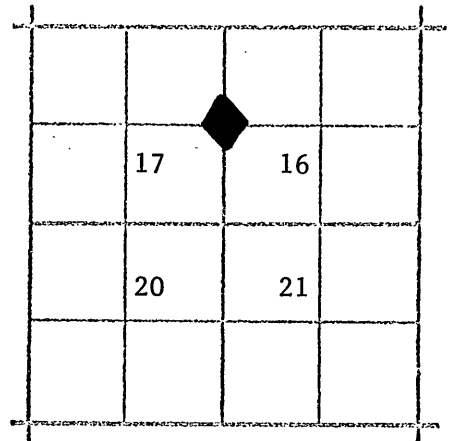


ORIGINAL DESCRIPTION: 40 ch. set a basalt stone 18"x14"x8", 12" in ground for 1/4 sec. cor. marked 1/4 on "W" face from which a Pine 30" dia. bears N 15°E 65 lks. dist. marked 1/4 S B.T. A Pine 44" dia. bears N 30°W 33 lks. dist. marked 1/4 S B.T.

RESTORATION BY, STAMP AND DATE:



Douglas M. Ferguson




November 25, 1969

EVIDENCE FOUND: Found 50" Pond. Pine marked 1/4 S B.T. and 36" Pond. Pine marked 1/4 S B.T., blazed line to south of position of 1/4 cor. Fence running 5' to 6' west of section line.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var. Located 1/4 cor. from original bearing trees on intersection of dist. from G.L.O. notes. Set a 2½"x1½" zinc coated pipe with brass cap marked as shown. Set pipe 2' in ground and constructed rock mound to brass cap. Set new B.T. 88" Pond. Pine bearing N 85°E 15.4' marked 1/4 S B.T. Set new B.T. 8" Pond. Pine bearing N 88°W 79.0' marked 1/4 S B.T. Using Leupold Staff Compass with 20°declination set off to east as checked by nearby solar observation.

MONUMENT MARKED

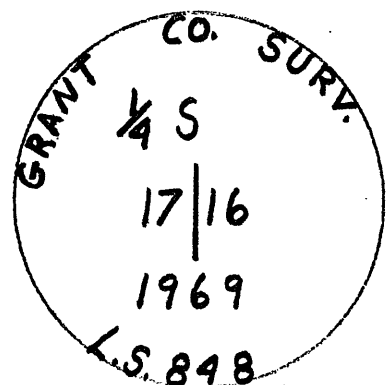

Complete and File with Office of the Grant County Surveyor, Grant County, Oregon, Courthouse, Canyon City, Oregon 97820