


CORNER RESTORATION

1/4 CORNER 13 and 24 TWP 16S RANGE 33½E

ORIGINAL SURVEY BY: Henry W. Cooke


CONTRACT NUMBER: 494

CONTRACT DATE: January 16, 1884

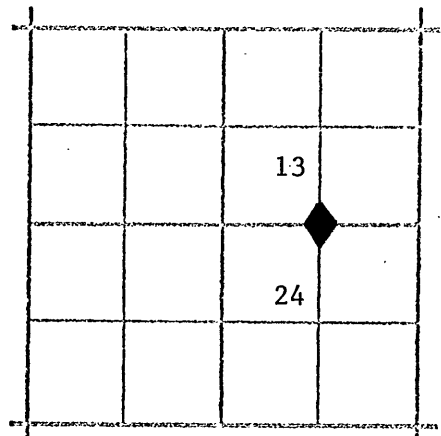


ORIGINAL DESCRIPTION: 40.05 ch. set a basalt stone 14"x14"x10", 9" in ground set 1/4 sec. cor. marked 1/4 on "N" face from which a pine 40" dia. bears N 40°E 54 lks. dist. marked 1/4 S B.T. A pine 40" dia. bears S 4°W 42 lks. dist. marked 1/4 S B.T.

RESTORATION BY, STAMP AND DATE.



Douglas M. Ferguson




November 26, 1969

EVIDENCE FOUND: Found 14"x14"x10" stone 9" in ground marked 1/4 on north face from which a pond. pine snag 40" dia. bears N 40°E 54 lks. marked 1/4 S B.T. A pond. pine 40" dia. bears S 4°W 42 lks.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var. Located 1/4 cor. which is 2½'x1½" zinc coated pipe with brass cap marked as shown 2' in ground with mound of stone to top of pipe at the position of the above described stone from which I set new bearing trees. A pond. pine 12" dia. bears N 7°W 59.4' dist. marked 1/4 S B.T. A pond. pine 8" dia. bears S 12°W 87.5' dist. marked 1/4 S B.T. Used Leupold Staff Compass with 20° set off to east as checked by solar observation.

MONUMENT MARKED

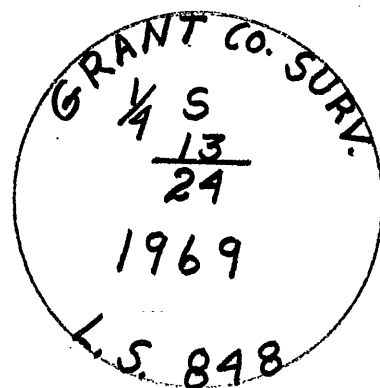

Complete and File with Office of the Grant
County Surveyor, Grant County, Oregon,
Courthouse, Canyon City, Oregon 97820