


CORNER RESTORATION

1/4 CORNER 20 and 21 TWP 16S RANGE 33½E

ORIGINAL SURVEY BY: Henry W. Cooke


CONTRACT NUMBER: 494

CONTRACT DATE: January 16, 1884

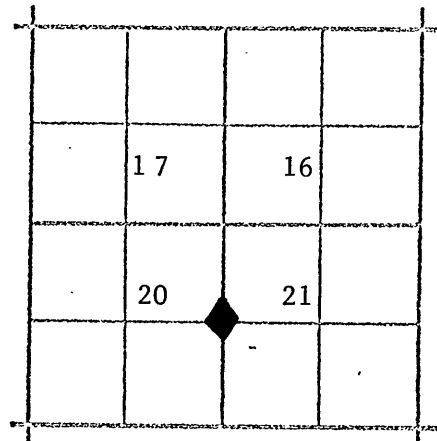


ORIGINAL DESCRIPTION: 40 ch. set a basalt stone 20"x18"x6", 15" in ground for 1/4 sec. cor. marked 1/4 on "W" face from which a Pine 24" dia. bears S 87°E 17 lks. dist. marked 1/4 S B.T. A Pine 40" dia. bears S 38°W 44lks. dist..marked 1/4 S B.T.

RESTORATION BY STAMP AND DATE:



Douglas M. Ferguson




November 25, 1969

EVIDENCE FOUND: Found 4'x25" stump marked 1/4 S B.T. and 50" Pond. Pine marked 1/4 S B.T.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var. Located 1/4 cor. from original bearing trees on intersection of dist. from G.L.O. notes. Set 2½'x1½" zink coated pipe with 2" brass cap marked as shown. Set pipe 2" in ground with rock mound constructed to brass cap. Set new B.T. 15" 15" Pond. Pine bearing N 52°E 36.5' marked 1/4 S B.T. Set new B.T. 16" Pond. Pine bearing S 87°W 45.0' marked 1/4 S B.T. Using Leupold Staff Compass with 20° declination set off to east as checked by nearby solar observation.

MONUMENT MARKED

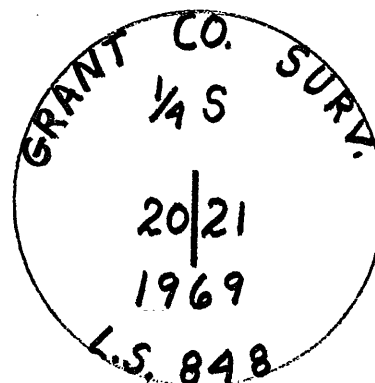

Complete and File with Office of the Grant County Surveyor, Grant County, Oregon, Courthouse, Canyon City, Oregon 97820