

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

The original corner was established in 1883 by Henry W. Cooke under Contract No. 488. The original notes state:

"Set basalt stone 16x12x10 ins 10 ins in the ground for 1/4 Sec cor, marked 1/4 on W. face- from which
A pine 36 ins dia. bears N63°E 28 lks dist. marked 1/4SBT.
A pine 50 ins dia. bears S62°W 93 lks dist. marked 1/4SBT.

DIAGRAM

T16S
R33½E
¼
S24

Description of corner evidence found:

Found a 17x16x5 stone marked 1/4 on the under (west) side.

38" Ponderosa Pine bears S63¼°W, 62.4 ft (to center of tree), scribed 1/4S in an opened face.
29" Ponderosa Pine bears N64½°E, 27.1 ft (to center of tree), scribed 1/4S in an opened face.

Description of monument and accessories I established to perpetuate the original location of this corner:

At the base of the original monument, I set a 3¼" x 30" aluminum monument 18" in the ground in a mound of stone. I placed the original stone in the mound.

Marked a 5" Ponderosa Pine S33-3/4°W, 45.1 ft, scribed 1/4S24BT, with a 3/4" brass washer "LS 1918".


Marked a 10" Fir N68½°W, 70.4 ft, scribed 1/4S24BT, with a 3/4" brass washer "LS 1918".

Painted faces and bands red and attached appropriate USFS signs to BTs. Set a steel fence post North 3 ft with Attention sign.
Basis of Bearings - solar observation.

Work performed 6/15/85

Witness: Louise H. Parsons, Douglas T. Parsons
Road Cadastral Survey for the USDA, Forest Service.

Tyler B. Parsons
Professional Land Surveyor
1915 S.E. Stone St.
Corvallis, OR 97333
(503) 752-7515

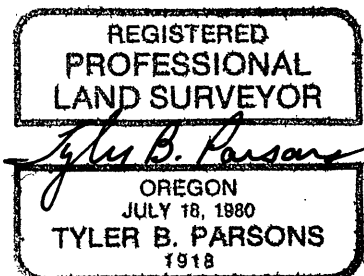

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 22 day of Aug, 1985
Robert D. Beyer by _____
(COUNTY OFFICIAL) (DEPUTY)