

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established in 1884 by Henry W. Cooke, under General Land Office Contract 464. Surveyor Generals records state: Set a basalt stone 16x10x10 in. 11 in. in the ground for corner to sections 27, 28, 33, and 34 marked with 1 notch on S and 3 notches on E edges.

From Which:

A pine 40 in. dia. bears N 88°E 173 lks dist. marked T16S R33½E S 27 BT. A pine 12 in. dia. bears S85°E 26 lks dist. marked T16S R33½E S 34 BT. a pine 36 in. dia. bears N 28°W 161 lks dist. marked T16S R33½E E sec. 28 BT.

Dug a pit 18x18x12 in sec. 33 5½ ft. dist., and raised a mound of earth alongside.

DIAGRAM

T16S	R33½E
S28	S27
S33	S34
1982	
PLS848	

Description of corner evidence found:

Found a 18x8x8" stone marks visible but faint.

A pine 24" dia. with healed over-blaze bears S85°E 17.4 ft.

A dead pine 36" dia. with scribing visible bears N88°E, 114 ft.

Accepted position as corner location.

Description of monument and accessories | established to perpetuate the original location of this corner:

Set a 30"x2" aluminum pipe with a 3½" aluminum cap, stamped as shown in diagram.

Set 20" in the ground, set original stone east alongside.

From Which:



A pine 14" dia. bears N36°W 135.3 ft. scribed T16S R33½E S34 BT.

A pine 12" dia. bears N43½°E 28.3 ft. scribed T16S R33½E S27 BT.

A pine (original BT.) 24" dia. bears S58°E 17.4 ft. scribed T16S R33½E S34 BT.

A pine 13" dia. bears S9°W 38.9 ft. scribed T16S R33½E 33 BT.

Nailed brass washers stamped PLS848, warning & BT signs to each tree, & painted 6" red band around each tree. Set a steel post with warning sign 5'ft. north of corner.

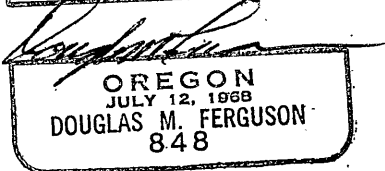

Corner monumented 8-10-82
Witnessed by D. Mitchell Ferguson

Office of Surveyor County of Grant
State of Oregon I hereby certify that the within instrument was filed in this office
for record on the 17 day of Feb, 1983
Robert D. Ferguson by _____
(COUNTY OFFICIAL) (DEPUTY)