


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original survey by Henry W. Cooke in 1884.
Set: Basalt stone, 16X12X10, 11" in ground, mkd. 1/4 on West face.

Bearing trees:
16" pine, N80°E, 20 links=13.2'
8" pine, N80°W, 14 links=9.24'

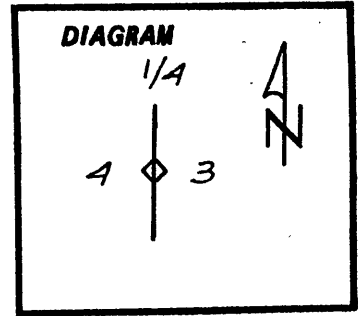

Description of corner evidence found:

No trace of original monument or bearing trees found. There are very few pines in this area- mostly fir and tamarack.

Description of monument and accessories | established to perpetuate the original location of this corner:

Set 2 1/2"X30" alum. pipe with alum. cap 25" in ground, in a small stone mound.
The following bearing trees were marked:

10" W. fir, N36 1/4°E, 36.9' to face, 37.3' to CL, marked: "1/4S3 BT"
9" Lodgepole pine, N31°W, 58.2' to face, 58.7' to CL, mkd: "1/4S4 BT"

Above trees have painted red faces and red bands, USFS signs and brass washer stamped #1658 attached to lower portion of face.


Variation 17° East using staff compass.
Witnessed by Randall Schulson Aug. 1983.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Ronald H. Schulson

OREGON
JULY 14 1978
RONALD H. SCHULSON
1658

Alum. cap stamped as shown:



Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 30 day of Nov, 1983
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)