


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established by Henry Cooke under Contract No. 488, dated 1883  
Set a post with marked stone, marked  $\frac{1}{4}$  S on N face.  
12" Pine N68° E 23 lks  
16" Fir S 30° E 53 lks

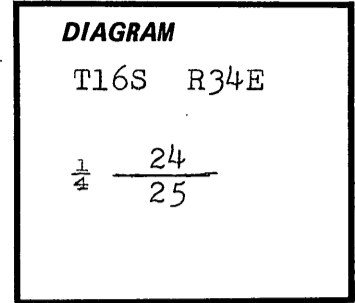

Description of corner evidence found:

Found a 12" down snag with scribe  $\frac{1}{4}$  S BT visible. Unable to identify exact location of BT as no ground roots were evident. No other evidence was found.

Description of monument and accessories I established to perpetuate the original location of this corner:

Based on survey I proportioned the corner to determine the relation with the found BT. The proportioned point fell with the BT in the called bearing but short of called distance by 4 feet. At the proportioned distance I set a 2"x30" Alum. pipe with  $3\frac{1}{2}$ " cap in stone mound and stamped:



5" Pine bears S 12° W 12.3', scribed  $\frac{1}{4}$  S 25 BT  
12" Pine bears N 85° W 5.4', scribed  $\frac{1}{4}$  S 24 BT  
Each BT has a brass disc (LS 559), BT tag, sign 54-4

I certify the above described corner was reestablished as described on Sept. 15, 1981.

Witness: Sherm Zemke  
Sherm Zemke

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

Elbert Driver

OREGON  
JANUARY 2, 1962  
ELBERT DRIVER  
559

Office of Surveyor County of Grant  
State of Oregon, I hereby certify that the within instrument was filed in this office  
for record on the 21 day of Oct, 1981  
Robert D. Leggett by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)