


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner was established by Henry Cooke under Contract No. 488, dated 1883
Set a stone 18x16x7 marked with 2 notches on S and 4 notches on N edges and raised a mound of stone.

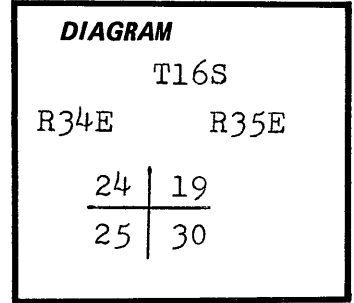


Description of corner evidence found:

Found a stone 14x12x8 with 19,24,25,30 chisled on side of stone in a small stone mound.

Description of monument and accessories established to perpetuate the original location of this corner:

As the evidence found did not agree with the original notes the location of the stone was determined to be in the proper location based on called distance. I replaced the stone with a 2"x30" Alum. pipe with 3 1/2" cap in stone mound and stamped:



I certify the corner was restored as descibed Sept. 15, 1981.

Witness: Sherm Zemke
Sherm Zemke

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Elbert Driver

OREGON
JANUARY 2, 1962
ELBERT DRIVER
559

Office of Surveyors County of Grant
State of Oregon I hereby certify that the within instrument was filed in this office
for record on the 21 day of Sept, 1981
Robert D. Dugitt by _____
(COUNTY OFFICIAL) (DEPUTY)