


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established by Henry Cooke under  
Contract No. 488, dated 1883  
Set a stone 22x14x10 with 1 notch on South and  
5 notches on North  
14" Pine N 68° E 40 lks.  
22" Pine S 30° E 36 lks  
18" Pine S 28° W 28 lks.  
16" Pine N 36° W 38 lks.

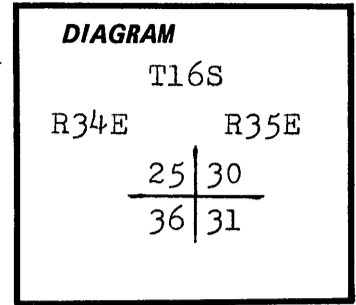

Description of corner evidence found:

Did not find original stone  
8" Pine snag N 68° E 40 lks, scribe T16S R35E S BT visible.  
16" Down Pine snag S 30° E 36 lks., rotted with hole remaining were  
tree stood.  
18" Pine stump N 36° W 38 lks., Lower portion of BT blaze visible.  
No other evidence found.

Description of monument and accessories established to perpetuate the  
original location of this corner:

I set a 2"x30" Alum. pipe with 3½" cap in large stone mound  
and stamped:  
9" Pine bears N 16° W 59.0', scribed T16S R34E S25 BT.  
11" Pine bears N 45° E 96.7', scribed T16S R35E S30 BT.  
15" Pine bears S 21° E 41.2', scribed T16S R35E S31 BT.  
20" Pine bears S 65° W 38.0', scribed T16S R34E S36 BT.  
Each BT has a brass disc (LS 559), BT tag, sign 54-4.



I certify the corner was restored as described Sept. 8, 1981.

Witness: Sherm Zemke  
Sherm Zemke

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

Elbert Driver

OREGON  
JANUARY 2, 1962  
ELBERT DRIVER  
559

Office of Surveyor County of Grant  
State of Oregon, I hereby certify that the within instrument was filed in this office  
for record on the 21 day of Oct, 1981  
Robert D. Baggett by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)