


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established by Alanzo Gesner under Contract No. 206 bearing the date of July 10, 1874. Notes State: set stone 14"x12"x8"

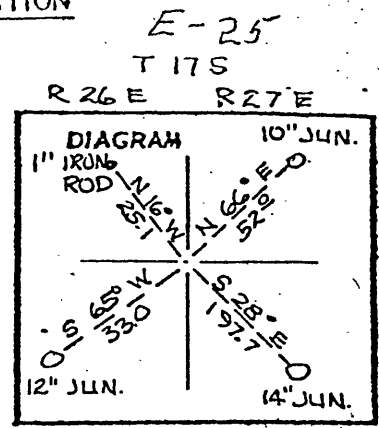


Description of corner evidence found:

Made search for original corner at proportion position, found no evidence of original monument.

Description of monument and accessories established to perpetuate the original location of this corner

Set corner at proportioned position established per a survey by Century West Engineering Corporation under U.S.F.S. Contract #53-04H1-9-7306N.

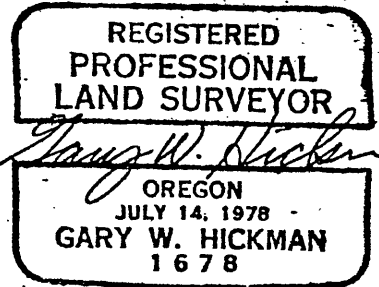

Set 3" aluminum cap on 2 1/2" aluminum pipe in rock mound 3' base to top protruding 6" above ground from which:


- New bearing trees:
N66°E, 52.0 ft., 10" Juniper, scribed (T17S, R27E, S6, BT), Sign #54-3.
S28°E, 197.7 ft., 14" Juniper scribed (T17S, R27E, S7, BT), Sign #54-3.
S65°W, 33.0 ft., 12" Juniper scribed (T17S, R26E, S12, BT), Sign #54-3.

Set 1" Iron Rod:
N16°W, 25.1 ft., 1" Iron Rod stamped R.M. S1, sign #54-3.

O.L.S. tag 1678 attached to all B.T.'s

I, Gary W. Hickman, P.L.S. 1678, certify the above corner monument was established as herein described in June of 1979.

Witness: Steve Miller, party chief and Steve Cortright, chainman.



Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office for record on the 5 day of Oct, 1979, at 3 o'clock P.m., (signed) Robert D. Begett by Robert D. Begett (COUNTY OFFICIAL) Robert D. Begett (DEPUTY)