


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

G.L.O., 1882, by Henry W. Cooke, Contract #427.
Set 16"X12"X5" Basalt stone, with mound of stone along side.

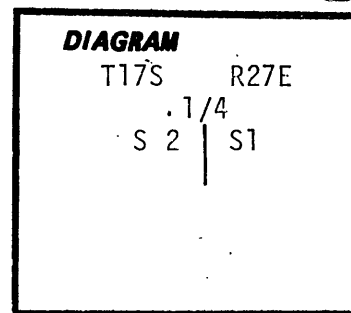

Description of corner evidence found:

No evidence of original corner found. Found many stones of approximate called size in area, but found no marks or remains of mound. Set at single proportionate distance between section corners 1/2 mile North and 1/2 mile South.

SEE MAP OF SURVEY #1015

Description of monument and accessories I established to perpetuate the

original location of this corner:

Set 2"X30" alum. pipe with 3" alum. cap, marked as shown 28" in ground.
19"X22" Double Juniper S11°E 211.6' scribed "1/4S1BT".
18" Juniper N50°W 77.9' scribed "1/4S2BT".
Set 6' metal fence post 2.0' North with USFS 54-4 sign.

T17S R27E

1/4

S2 | S1

1987

PLS 1098

BT's have USFS 54-3 and 54-4 signs, and 60d nail with 1 1/2" alum. disk
"C. WAYNE COOK PLS 1098" in side center at base. Distance measured to nail.
Bearings measured with Silva Ranger compass (Var. 19° East). Corner falls
in bottom of major drainage, 49' west of dry gulch course S5°W.

I hereby certify that the above corner was monumented as hereon described on
July 15, 1987.

Witnesses: L.R. Edgar, A.D. Cook and S.J. Everett.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

C. Wayne Cook

OREGON
JULY 22, 1977
C. WAYNE COOK
1098

C. WAYNE COOK
3180 ALDERCREST ROAD
TILLAMOOK, OREGON 97141
503-842-8380

Office of..... *Surveyor* County of..... *Grant*
State of..... *Oregon* I hereby certify that the within instrument was filed in this office
for record on the..... *17* day of..... *Oct* 19..... *87*
..... *Robert D. Baggett*
(COUNTY OFFICIAL) (DEPUTY)