


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

G.L.C., 1882, by Henry W. Cooke, Contract #427.
 Set an Alder post 24" in ground.
 5" Alder N60°W 28 lks.
 5" Alder S8°E 48 lks.
 Brook 5 lks. wide 0.2 ch. North crs. S60°W.

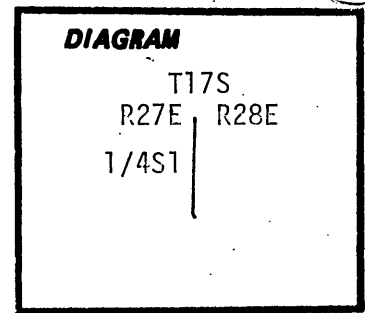

Description of corner evidence found:

No evidence of original corner found. Search area was in marshy area created by beaver dam on Morgan creek. Set at single proportionate position between the West 1/4 of section 6 and the West 1/4 of section 7.

SEE MAP OF SURVEY # 1015

Description of monument and accessories I established to perpetuate the

~~original~~ location of this corner:

Set 2"X30" alum. pipe with 3" alum. cap, marked as shown, 15" in ground, with mound of stone to cap. T17S
 10" Juniper N50°W 103.2' scribed "1/4S1BT". R27E R28E
 10" Ponderosa pine S5°E 85.0' scribed "BT", chopped "X" at breast height. 1/4 S1
 Set 6' metal fence posts 2.3' South and 2.3' West w/ USFS 54-2 and 54-4 signs. 1987
 PLS 1098
 BT's have USFS 54-3 and 54-4 signs, an 60d nail with 1 1/2" alum. disk
 "C. WAYNE COOK PLS 1098" in side center at base. Distance measured to nail.
 Bearings measured with Silva Ranger compass (Var. 19° East).

I hereby certify that the above corner point was monumented as hereon described on July 14, 1987.
 Witnesses: L.R. Edgar, A.D. Cook and S.J. Everett.

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

C. Wayne Cook

**OREGON
JULY 22, 1977
C. WAYNE COOK
1098**

**C. WAYNE COOK
3180 ALDERCREST ROAD
TILLAMOOK, OREGON 97141
503-842-8380**

Office of Surveyor County of Grant
 State of Oregon, I hereby certify that the within instrument was filed in this office
 for record on the 17 day of Oct, 1987
Robert D. Bryant by _____
 (COUNTY OFFICIAL) (DEPUTY)