


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

G.L.C., 1882, by Henry W. Cooke, Contract 427.
Set 14"X10"X9" Basalt stone, with mound of stone along side.

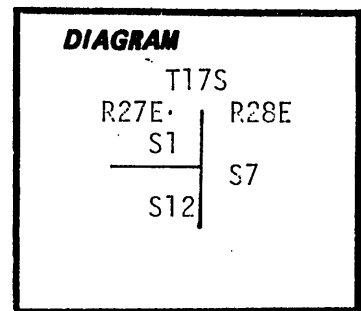

Description of corner evidence found:

No evidence of original corner found. Set at single proportionate distance between the West 1/4 of section 6 and the West 1/4 of section 7.

SEE MAP OF SURVEY #1015

Description of monument and accessories I established to perpetuate the original location of this corner:

Set 2"X30" alum. pipe with 3" alum. cap, marked as shown, 15" in ground with mound of stone to cap.
24" Ponderosa pine N52°W 235.5' scribed "T17SR27ES1BT".
12" Juniper S47°W 28.9' scribed "T17SR27ES12BT".
Set 6" metal fence post 2.9' North w/ USFS 54-4 sign.
BT's have USFS 54-3 and 54-4 signs and a 60d nail w/1 1/2" alum. disk "C. WAYNE COOK PLS 1098" in side center at base. Distance measured to nail. Bearings measured with Silva Ranger compass (Var. 19°East).
Corner falls on a steep west slope, approximately 100' north of a shallow draw.

T17S	
R27E	R28E
S1	S7
S12	
1987	
PLS 1098	

I hereby certify that the above corner point was monumented as hereon described on July 13, 1987.

Witnesses: L.R. Edgar, A.D. Cook and S.J. Everett.

REGISTERED PROFESSIONAL LAND SURVEYOR

C. Wayne Cook

OREGON JULY 22, 1977 C. WAYNE COOK 1098
--

C. WAYNE COOK
 3180 ALDERCREST ROAD
 TILLAMOOK, OREGON 97141
 503-842-8380

Office of.....*Sumner*..... County of.....*Grant*.....
 State of.....*Oregon*....., I hereby certify that the within instrument was filed in this office
 for record on the.....*12* day of.....*Oct*....., 19.....*87*
*Robert D. Bryant*..... by
 (COUNTY OFFICIAL) (DEPUTY)