


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

G.L.O., 1882, by Henry W. Cooke, Contract #427.
Set 14"x10"x4" Basalt stone, with mound of stone along side.

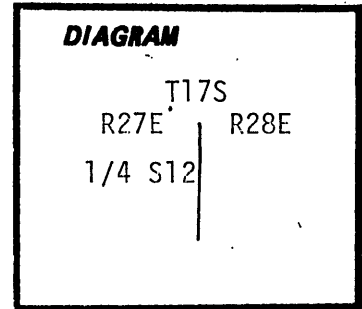

Description of corner evidence found:

No evidence of original corner found. Set at single proportionate distance between the West 1/4 of section 7 and the SW corner of section 7.

SEE MAP OF SURVEY #1015

Description of monument and accessories I established to perpetuate the

original location of this corner:

Set 2"x30" alum. pipe with 3" alum cap, marked as shown, 27" in ground.
17" Juniper N18°W 75.6' scribed "1/4S12BT".
12" Juniper S78°W 103.9' scribed "1/4S12BT".
Set 6' metal fence post 1.6' North with USFS 54-4 sign.
BT's have USFS 54-3 and 54-4 signs, and 60d nail with 1 1/2" alum disk
"C. WAYNE COOK PLS 1098" in side center at base. Distance measured to nail.
Bearings measured with Silva Ranger Compass (Var. 19° East).
Corner falls 6' West of a 3' wide dry gulch course S30°W
I hereby certify that the above corner was monumented as hereon described
on July 13, 1987.

T17S
R27E R28E
1/4S12
1987
PLS 1098

Witnesses: L.R. Edgar, A.D. Cook and S.J. Everett.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

C. Wayne Cook

OREGON
JULY 22, 1977
C. WAYNE COOK
1098

C. WAYNE COOK
3180 ALDERCREST ROAD
TILLAMOOK, OREGON 97141
503-842-8380

Office of.....*Surveyor*..... County of.....*Grant*.....
State of.....*Oregon*....., I hereby certify that the within instrument was filed in this office
for record on the.....*12* day of.....*Oct*....., 19.....*87*.....
.....*Robert H. Baggett*..... by
(COUNTY OFFICIAL) (DEPUTY)