


CORNER RESTORATION

CORNER: NE Sec:15 TWP: 17S. RANGE:27E.

ORIGINAL SURVEY BY: Henry W. Cooke

CONTRACT NUMBER: 427

CONTRACT DATE: June 24, 1882

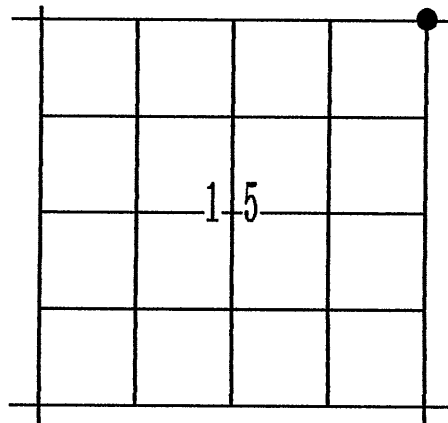

ORIGINAL DESCRIPTION: Point on west slope of mountain about 12.00 ft. above river and set a basalt stone 14x12x7 ins. 10 ins. in ground for cor. to secs. 10, 11, 14 & 15 marked with 4 notches on South and 2 notches on East edges.

from which:

a juniper 12 ins. in dia. bears N55°E, 27 lks dist marked T17S R27E S11 BT.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
S.D. Follweiler
D.E. Mooney
R.J. Lewis

RECEIVED AND
FILED

MAR 29 1994

OFFICE OF COUNTY SURVEYOR
Attest: *Robert D. Bagett*
James Russell

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett

OREGON
JULY 12, 1883
ROBERT D. BAGETT
598

Renewal Date 12/31/94

March 22, 1994

Grant County Surveyor

EVIDENCE FOUND: Found a basalt stone 6"x9"x14" marked with 4 notches on one face and 2 notches on an adjacent face lying west and alongside a mound of stone.

also:

A Juniper 25" diam., bears N74°E, 24.7 ft. with grown over blaze, we partially opened blaze to verify scribing.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the corner point: I set a 1½"x30" galv. iron pipe, 24" in the ground, with attached Grant County Surveyor brass cap marked as shown.

From which I SCRIBE NEW BEARING TREES:

A Juniper 6"diam., bears N35°E, 63.7 ft. marked X CSBT.

A Juniper 8"diam., bears S40°E, 29.3 ft. marked T17S R27E S14 CSBT.

A Juniper 10"diam., bears S19°W, 80.8 ft. marked T17S R27E S15 CSBT.

A Juniper 11"diam., bears N58°W, 62.0 ft. marked T17S R27E S10 CSBT.

MONUMENT MARKED

GRANT COUNTY
SURVEYOR

T17S R27E

S10 | S11

S15 | S14

1994
OPLS 598

Buried marked stone west and alongside iron pipe, raised a mound of stone 2 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape, measuring to a 50d nail driven in the sidecenter at the root crown of the BT's. Attached BT tags to BT's.