


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

GL0, 1882, by Henry W. Cooke, contract #427.
Set 24"X16"X14" Basalt stone 16" in ground, with "1/4" on north.
Mound of stone alongside.

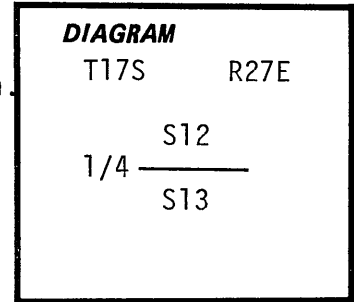

Description of corner evidence found:

22"X16"X13" Basalt stone (broken in half during search) set 10" in ground, no definite marks visible on badly weathered surface.
Remains of stone mound along north side of stone.

Description of monument and accessories I established to perpetuate the

original location of this corner: Set 2 1/2"X30" alum. pipe with 3" alum. cap marked:	T17S R27E
14" in ground to bed rock, in place of original stone, with mound of stone	S12
14" high. Buried pieces of original stone in south portion of mound.	1/4 —
19" Juniper S74°W 76.2', scribed "1/4S13PT".	S13
10" Juniper N21°E 63.8', scribed "1/4S12BT".	1987
Set 6' metal fence post 1.5' SW with USFS 54-4 sign.	PLS 1098
Top of spur ridge 19' East, course S10°W.	
Bench on spur ridge 100' North, course east.	
BT's have USFS 54-3 and 54-4 signs, and a 60d nail with a 1 1/2" alum. disk marked	
"C. WAYNE COOK PLS 1098" in side center at base. Distance measured to nail with	
steel tape. Bearings measured with Silva Ranger compass (Var. 19° east).	

I hereby certify that the above corner was perpetuated as hereon described on
July 13, 1987.
Witnessed by: C. G. Cook.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

C. Wayne Cook

OREGON
JULY 22, 1977
C. WAYNE COOK
1098

C. WAYNE COOK
3180 ALDERCREST ROAD
TILLAMOOK, OREGON 97141
503-842-8380

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 13 day of OCT, 1987
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)