


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

GLO, 1882, by Henry W. Cooke, Contract # 427.
Set 14"x7"x4" Basalt stone 11" in ground with 4 notches
on south and 2 notches on north, 4 1/2' base X 4' high mound
of stone alongside.

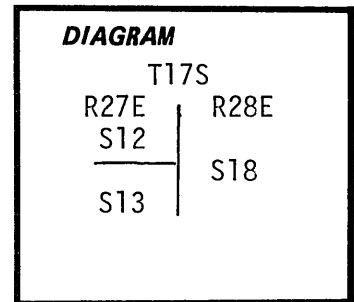

Description of corner evidence found:

13"x9"x3" Basalt stone with 4 notches on south and 6 notches on west, in place.
No evidence of stone mound found.

Description of monument and accessories | established to perpetuate the original location of this corner:

Set 2 1/2" aluminum pipe with 3" aluminum cap marked T17S
28" in ground in place of original stone with stone buried alongside and R27E R28E
north of the pipe. S12
15" Juniper N64°W 50.0' scribed "T17SR27ES12BT". S13 S18
10" Juniper S62°W 41.2' scribed "T17SR27ES13BT".
Set 6' metal fence post 2.5' North with USFS 54-4 sign. 1987
Corner falls on a north slope +- 300' South of a wide swale that drains PLS 1098
westerly.

BT's have USFS 54-3 and 54-4 signs and a 60d nail with a 1 1/2 aluminum disk marked
"C. Wayne Cook PLS 1098" in side center at base. Distance measured to nail with steel
tape. Bearings measured with Silva Ranger compass (Var. 20° east).

I hereby certify that the above corner was perpetuated as
hereon described on June 30, 1987.
Witnesses: L.R. Edgar, S.J. Everett and A.D. Cook.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

C. Wayne Cook

OREGON
JULY 22, 1977
C. WAYNE COOK
1098

C. WAYNE COOK
3180 ALDERCREST ROAD
TILLAMOOK, OREGON 97141

503-842-8380

Office of... *Surveyor* ... County of... *Grant* ...
State of... *Oregon* ... I hereby certify that the within instrument was filed in this office
for record on the... *17* ... day of... *July* ... , 19... *87* ...
... *Robert D. Baggett* ... by ...
(COUNTY OFFICIAL) (DEPUTY)