


CORNER RESTORATION

CORNER: SW Sec:17 TWP: 17S. RANGE:27E.

ORIGINAL SURVEY BY: Henry W. Cooke

CONTRACT NUMBER: 427

CONTRACT DATE: Dec. 15, 1881

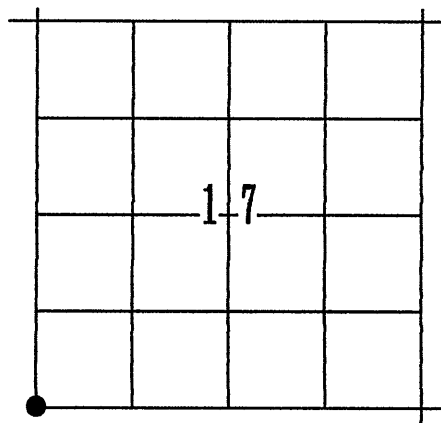

ORIGINAL DESCRIPTION:

Set a Basalt stone 20x12x8 ins. 15 ins. in ground for cor. to secs. 17,18,19 & 20 marked with 3 notches on South and 5 Notches on E. sides and raised a mound of stone alongside 4 ft high 4½ ft. base.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
S.D. Follweiler
D.E. Mooney

RECEIVED AND
FILED

DEC 8 1993

OFFICE OF COUNTY SURVEYOR
Attest: *[Signature]*

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett

OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

Renewal
Date
12/31/94

November 24, 1993

Grant County Surveyor

EVIDENCE FOUND: Fd. 6"x11"x17" basalt stone, marked with 3 grooves on south and 5 grooves on east. Corner stone firmly set 1 foot east of mound of stone.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the corner point: I set a 1½"x30" galv. iron pipe, 22" in the ground, with attached Grant County Surveyor brass cap marked as shown.

From which I SCRIBE NEW BEARING TREES:

A Juniper 8"diam., bears N33°E, 57.3 ft.
marked T17S R27E S17 CSBT.

A Juniper 14"diam., bears S01°E, 120.0 ft.
marked T17S R27E S20 CSBT.

A Juniper 15"diam., bears S53°W, 290.0 ft.
marked T17S R27E S19 CSBT.

A Juniper 9"diam., bears N31°W, 79.4 ft.
marked T17S R27E S18 CSBT.

MONUMENT MARKED
GRANT COUNTY
SURVEYOR

T17S	R27E
S18	S17
S19	S20

1993
OPLS 598

Buried marked stone east and alongside iron pipe, raised a mound of stone 3 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape, measuring to a 50d nail driven in the sidecenter at the root crown of the BT's. Attached BT tags to BT's. Corner is 37 feet west of an old north-south fenceline.