


CORNER RESTORATION

CORNER: N $\frac{1}{4}$ Sec:23 TWP: 17S. RANGE:27E.

ORIGINAL SURVEY BY: Henry W. Cooke

CONTRACT NUMBER: 427

CONTRACT DATE: June 24, 1882

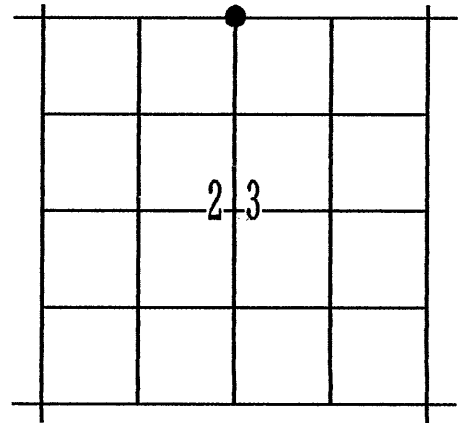

ORIGINAL DESCRIPTION: Set a basalt stone 24x20x18 ins. 16 ins. in ground for 1/4 sec. cor. marked 1/4 on N. face dug pits 18x18x12 ins. E & W of stone 5 $\frac{1}{2}$ ft. dist. and raised a mound of earth 2 ft. high 4 $\frac{1}{2}$ ft. base alongside.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
S.D. Follweiler
D.E. Mooney
R.J. Lewis

RECEIVED AND
FILED

MAR 29 1994

OFFICE OF COUNTY SURVEYOR
Attest: *James Russell*

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett

OREGON
JULY 12, 1983
ROBERT D. BAGETT
598

Renewal Date 12/31/94

March 22, 1994

Grant County Surveyor

EVIDENCE FOUND: Found a basalt stone 11"x14"x30" marked 1/4 on the north face firmly set 15" in the ground.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the corner point: I set a 1 $\frac{1}{2}$ "x30" galv. iron pipe, 30" in the ground, with attached Grant County Surveyor brass cap marked as shown.

From which I SCRIBE NEW BEARING TREES:

A Juniper 12"diam., bears N37°E, 7.3 ft. marked 1/4 S14 CSBT.

A Juniper 13"diam., bears S25°E, 26.7 ft. marked 1/4 S23 CSBT.

A Juniper 15"diam., bears S66°W, 80.2 ft. marked 1/4 S23 CSBT.

A Juniper 12"diam., bears N41°W, 71.5 ft. marked 1/4 S14 CSBT.

MONUMENT MARKED

GRANT COUNTY
SURVEYOR

T17S R27E
S14

$\frac{1}{4}$ ———
S23

1994
OPLS 598

Buried marked stone west and alongside iron pipe, raised a mound of stone 2 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape, measuring to a 50d nail driven in the sidecenter at the root crown of the BT's. Attached BT tags to BT's.