


CORNER RESTORATION

CORNER: Section corner common to Sections 21, 22, 27, and 28
Township 17 South, Range 27 East, Willamette Meridian

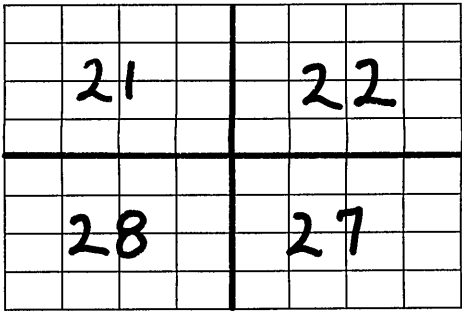

ORIGINAL SURVEY BY: Henry W. Cooke

CONTRACT NUMBER: 427

CONTRACT DATE: June, 1882

ORIGINAL DESCRIPTION: Set basalt stone 18 x 18 x 4 inches with 2 notches on South and 3 notches on East edges. Raised mound of stone alongside 4-foot high, 4½-foot base.

RESTORATION BY, STAMP AND DATE:

John G. Lawson
Mike Weisenborn


DATE: September, 2001



EVIDENCE FOUND: Found marked stone as described but tipped over with a ring of stone around.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED: Show how trees are scribed and basis of bearings, including compass var.

At the corner point, I set a 1" x 24" galvanized iron pipe, with a Brass Cap stamped as shown, 18" in the ground, on a hillside.



From which:

8" Juniper bears N71W, 38.3 feet, scribed Section 21, T17S, R27E, BT
12" Juniper bears N60E, 15.8 feet, scribed Section 22, T17S, R27E, BT
10" Juniper bears S57E, 59.1 feet, scribed Section 27, T17S, R27E, BT
8" double Juniper bears S44W, 185.8 feet, scribed Section 28, T17S, R27E, BT
Measurements to the center, var. 19°, hand-held compass.

RECEIVED AND
FILED

FEB 15, 2002

OFFICE OF COUNTY SURVEYOR
Attest: *Robert D. Baggett*
Michael C. Springer