


CORNER RESTORATION

CORNER: NW Sec:25 TWP: 17S. RANGE:27E.

ORIGINAL SURVEY BY: Henry W. Cooke

CONTRACT NUMBER: 427

CONTRACT DATE: June 24, 1882

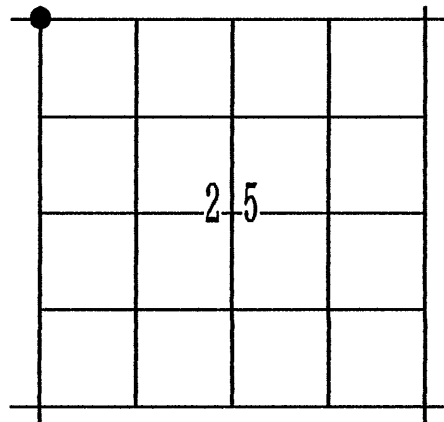

ORIGINAL DESCRIPTION: Set a basalt stone 16x12x10 ins. 11 ins. in ground for cor. to secs. 23, 24, 25 and 26 marked with 2 notches on S. and 1 on E. edges and raised a mound of stone alongside 2 ft. high 4½ ft. base.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
S.D. Follweiler
D.E. Mooney
R.J. Lewis

RECEIVED AND
FILED

MAR 29 1994

OFFICE OF COUNTY SURVEYOR
Attest: *Robert D. Bagett*

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett
OREGON
JULY 12, 1983
ROBERT D. BAGETT
598

Renewal Date 12/31/94

March 23, 1994

Grant County Surveyor

EVIDENCE FOUND: Found original basalt corner stone 8"x9"x16" marked with 2 grooves on the S. face and 1 groove on the E. face, stone had tipped over but when set upright the marks are properly oriented. I accept the position of this stone for the section corner. It is harmoniously related to other known corners in this area.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the corner point: I set a 1½"x30" galv. iron pipe, 26" in the ground, with attached Grant County Surveyor brass cap marked as shown.

From which I SCRIBE NEW BEARING TREES:

A Juniper 5"diam., bears N36°E, 75.6 ft. marked X CSBT.

A Juniper 10"diam., bears S82°E, 79.4 ft. marked T17S R27E S25 CSBT.

A Juniper 7"diam., bears S9°W, 104.9 ft. marked T17S R27E S26 CSBT.

A Juniper 10"diam., bears N70°W, 130.5 ft. marked T17S R27E S23 CSBT.

MONUMENT MARKED

GRANT COUNTY
SURVEYOR

T17S R27E S23	S24
S26	S25

1994
OPLS 598

Buried marked stone west and alongside iron pipe, raised a mound of stone 2 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape, measuring to a 50d nail driven in the sidecenter at the root crown of the BT's. Attached BT tags to BT's.