


CORNER RESTORATION

SE Corner
CORNER Sec.36 TWP 17 S. RANGE 27 E.

ORIGINAL SURVEY BY: Alonzo Gesner

CONTRACT NUMBER: 206

CONTRACT DATE: July 10, 1874

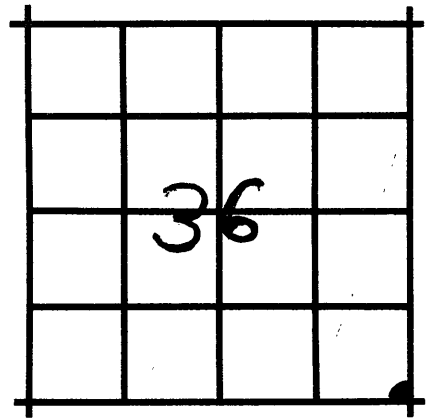

ORIGINAL DESCRIPTION: Set stone 14"x12"x6", for standard cor to Township 17 S, Ranges 27 & 28 E.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
D.I. Griffith

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett
OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

June 5, 1990

Grant County Surveyor

EVIDENCE FOUND: Found a stone 15"x11"x4" partially buried marked with 6 grooves on one edge, no other marks found.

RECEIVED AND
FILED

JUL 17 1990

OFFICE OF COUNTY SURVEYOR
Attest: *[Signature]*

See Survey No. 1149, dated June, 1990.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

In place of stone: I set a 1½"x30" galv. iron pipe, 20" in the ground, with attached brass cap marked as shown. From which;

A double-bole Juniper 8" diam bears N25°E, 173.61 feet, marked X BT

A 5/8" x 18" rebar with aluminum cap marked "GRANT COUNTY SURVEYOR RP1 " bears S54°E, 11.36 feet.


A 5/8" x 18" rebar with aluminum cap marked "GRANT COUNTY SURVEYOR RP 2" bears S32°W, 5.84 feet.

A 5/8" x 18" rebar with aluminum cap marked "GRANT COUNTY SURVEYOR RP 3" bears N80°W, 9.91 feet.

I buried the stone South and alongside the monument.

Raised mound of stone around the monument.

MONUMENT MARKED

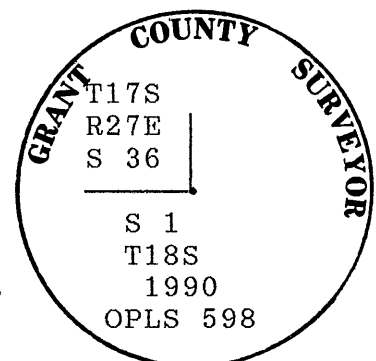

I used a magnetic compass with 18°E var. and steel tape, in the establishment of new accessories. The distances are to a 50d spike driven into the right side at the root crown. I attached a brass washer marked OPLS 644 to the BT blaze.