


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

GL0, 1880, by Banford Robb, Contract #366
Set 18"X10"X8" stone in mound of stone.

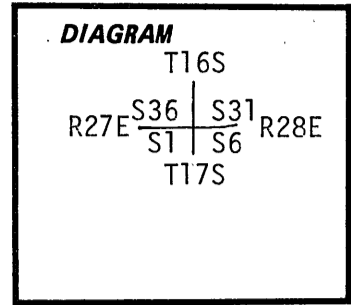

Description of corner evidence found:

18"X9"X8" rotted and weathered stone in mound of stone, no marks visible.

Description of monument and accessories I established to perpetuate the

original location of this corner: Set 2 1/2"X30" alum. pipe with 3" alum. cap marked:
18" in ground, in place of original stone, with mound of stone to cap,
original stone buried in mound.

T16S
R27E S36 S31
S1 S6 R28E
T17S
1987
PLS 1098

20" Juniper N20°E 35.9' scribed "T16SR28ES31BT".
 18" Juniper N32°W 64.1' scribed "T16SR28ES36BT".
 13" Juniper S78°W 32.9' scribed "T17SR27ES1BT".
 13" (at 2' high, splits into 3 stems) Juniper S15°E 57.6' scribed "T17SR28ES6BT".
 BT's have USFS 54-3 and 54-4 signs, and 60d nail with 1 1/2" alum. disk marked
 "C. Wayne Cook PLS 1098" in side center at base. Distance measured to nail with
 a steel tape. Bearings measured with a Silva Ranger compass (Var. 20°E).

I hereby certify that the above corner was perpetuated as hereon described on
June 28, 1987.

Witnessed by: A.D. Cook.

REGISTERED PROFESSIONAL LAND SURVEYOR

C. Wayne Cook

OREGON JULY 22, 1977 C. WAYNE COOK 1098
--

C. WAYNE COOK
 3160 ALDERCREST ROAD
 TILLAMOOK, OREGON 97141
 503-842-8380

Office of Surveyor County of Grant
 State of Oregon, I hereby certify that the within instrument was filed in this office
 for record on the 17 day of July, 1987
Robert D. Baggett by _____
 (COUNTY OFFICIAL) (DEPUTY)