


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

GLO, 1880, by Banford Robb, Contract #366
Set 12"X8"X6" Basalt stone in mound of stone.
12" Juniper N70°E 60 lks. (36.9').

GLO Retracement, 1882, by Henry W. Cooke, Contract #427
found evidence as per Robb's record.

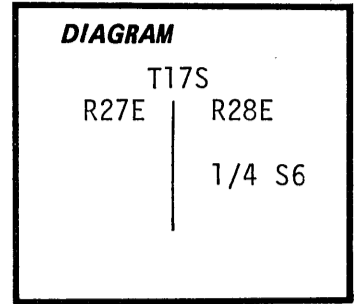


Description of corner evidence found:

12"X2' high Juniper stump with "BT" visible on partially closed lower face,
upper face missing.
Original stone missing (Point falls on steep easterly slope).

Description of monument and accessories established to perpetuate the

original location of this corner: Set 2 1/2" alum. pipe with 3" alum cap marked:
8" in ground to bed rock at record bearing and distance from original
BT face, with mound of stone to 3" below cap.
16" Juniper N62 1/2°E 26.6' scribed "1/4S6BT".
8" Juniper S56 1/2°E 30.8' scribed "BT" with "X" chopped at breast height.
6' metal fence post S15°E 1.4' with USFS 54-4 sign.
All BT's have USFS 54-3 and 54-4 signs. New BT's have a 60d nail with
1 1/2" alum. disk marked "C. Wayne Cook PLS 1098" in side center at
base. Distance measured to nail on new BT's with steel tape. Bearings
measured with Silva Ranger compass.(Var. 20° east).



I hereby certify that the above corner was perpetuated as
hereon described on June 27, 1987.
Witnessed by: A.D. Cook.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

C. Wayne Cook

OREGON
JULY 22, 1977
C. WAYNE COOK
1098

C. WAYNE COOK
3180 ALDERCREST ROAD
TILLAMOOK, OREGON 97141
503-842-8380

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 17 day of July, 1987
Robert D. Bayart by _____
(COUNTY OFFICIAL) (DEPUTY)