


RECEIVED AND
FILED

JUN 14 1973

JOHN LIVEIRA, County Clerk

By *Detleff Rowan* Deputy

CORNER RESTORATION

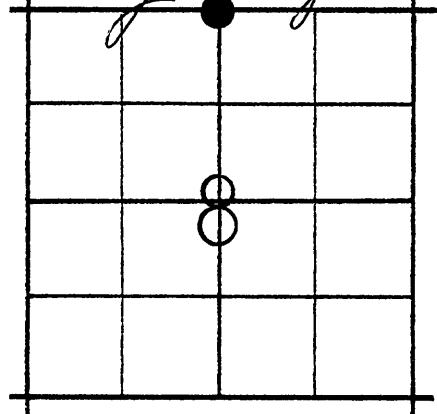

N 1/4 cor.
CORNER Sec 8 TWP 17S RANGE 28E., W.M.

ORIGINAL SURVEY BY: Henry W. Cooke

CONTRACT NUMBER: 427

CONTRACT DATE: October 15, 1881

ORIGINAL DESCRIPTION:

40.09 Set a basalt stone 14x12x10 ins. 10 ins. in the ground for 1/4 sec cor. marked 1/4 on N face, from which

A pine 18 ins. diam., bears N30°E, 42 lks. dist. mkd. 1/4S BT.

A pine 24 ins. diam., bears S.30°W, 56 lks. dist. mkd. 1/4S BT.

RESTORATION BY, STAMP AND DATE:

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett

OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

April 29, 1973

EVIDENCE FOUND:

Found a basalt stone 14x12x10 ins. firmly set in a mound of stone, from which: THE ORIGINAL BEARING TREES:

A 24" pine bears N34°E., 27.0 ft., marked 1/4S BT.

A stump hole of a burned out pine, bears S36°W., 41.0 ft. no scribing is visible on the remains of this BT.

This corner is about 25 feet West of a fence cor. fences run East & South.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

Set a 1 1/2" x 30" iron pipe at the corner point with brass cap marked as shown: The monument is set 20" in the ground from which,
NEW BEARING TREE: MONUMENT MARKED

A pine 8" diam. bears S.31°E., 19.8 ft. mkd. 1/4S8 CS BT.

Buried original corner stone West and alongside the iron pipe and raised a mound of stone to top of pipe.

Used compass with 20° East Variation and steel tape. Measured to the face of the blaze on the BT.

COUNTY SURVEYOR
T 17S R28E
1/4 S 5 / S 8
1973
PLS 598

Complete and File with Office of the Grant
County Surveyor, Grant County, Oregon,
Courthouse, Canyon City, Oregon 97820