


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

GLO, 1880, by Banford Robb, contract #366.
Set 12"x10"x8" Basalt stone in mound of stone with "1/4 on west.

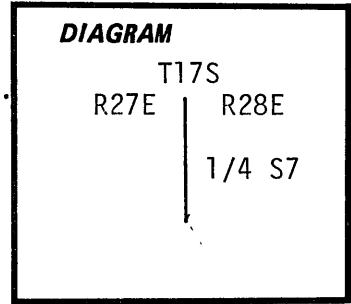

Description of corner evidence found:

12"x10"x8" Basalt stone in mound of stone with faint "1/" visible, 4 flaked and weathered away.

Description of monument and accessories I established to perpetuate the

original location of this corner: Set 2 1/2"x30" alum. pipe with 3" alum. cap marked:

20" in ground with mound of stone to cap, in place of original stone.

Buried original stone along east side of pipe.


13" Juniper S80 1/2°W (only 1 BT available in section 7) 23.7', chopped "X" at breast height and scribed "BT" at base.

20" Juniper N87 3/4°E 78.6', scribed "1/4S7BT".

Set 6' metal fence post 2.1' NE, with USFS 54-4 sign.

Fence line 17.5' North, course east X west.

BT's have USFS 54-3 and 54-4 signs, and 60d nail with 1 1/2" alum. disk marked "C. WAYNE COOK PLS 1098" in side center at base. Distance measured to nail with steel tape. Bearings measured with Silva Ranger compass (Var. 19° east).



I hereby certify that the above corner was perpetuated as hereon described on July 10, 1987.

Witnessed by: C.G. Cook.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

C. Wayne Cook

OREGON
JULY 22, 1977
C. WAYNE COOK
1098

C. WAYNE COOK
3180 ALDERCREST ROAD
TILLAMOOK, OREGON 97141
503-842-8380

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 2 day of Oct, 1987
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)