

RECEIVED AND  
**FILED**

JUN 14 1973

JOHN LIVEIRA, County Clerk

By: *Betty [Signature]* Deputy


**CORNER RESTORATION**

South 1/4  
CORNER Sec. 8 TWP 17S RANGE 28E., W.M.

ORIGINAL SURVEY BY: Henry W. Cooke

CONTRACT NUMBER: 427

CONTRACT DATE: October 15, 1881

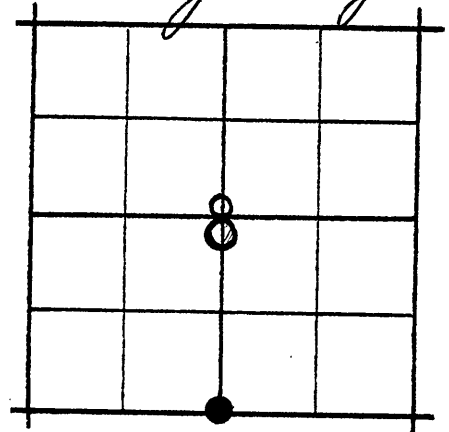

**ORIGINAL DESCRIPTION:**

- 40.24 Set a post 3 1/2 ft. long 3 ins. square, 2 1/4 ins in the ground for 1/4 Sec. cor. marked 1/4 on N. face from which
- A juniper 30 ins. on diam., bears S88°W 38 lks dist, mkd 1/4S BT.
- A juniper 26 ins. in diam., bears N40°W 53 lks dist, mkd 1/4S BT.

**RESTORATION BY, STAMP AND DATE:**

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Robert D. Baggett*

OREGON  
JULY 12, 1963  
ROBERT D. BAGETT  
598


April 28, 1973

**EVIDENCE FOUND:**

I found the two original juniper bearing trees, both in good condition. The original corner post was not found. Probably lost to decay. I established the corner by record distances from the BTs.

**DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:**

Show how trees are scribed and basis of bearings, including compass var.  
 Set a 1 1/2"x30" iron pipe 2 1/4 ins. in the ground, with brass cap mkd. as shown:  
 from which Original Bearing Trees:  
 A 48" Juniper brs. N87°W 25.1 ft. mkd. 1/4S BT. MONUMENT MARKED  
 A 40" juniper brs. N40°W 35.0 ft., mkd. 1/4S BT.  
**NEW BEARING TREES:**  
 A 8" pine brs. N24°W., 6.6 ft. mkd. 1/4S8 CS BT.  
 A 8" pine brs. S18°W., 24.7 ft., mkd. 1/4S17 CS BT.

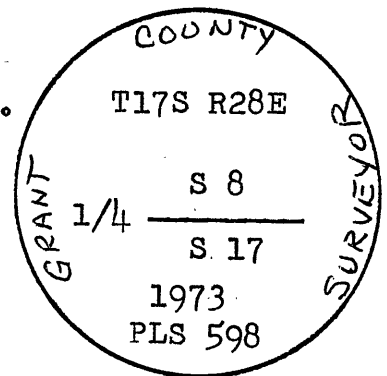

Used a compass with 20° E. var. and a steel tape measuring to the face of the blaze on the BTs.

Complete and File with Office of the Grant  
County Surveyor, Grant County, Oregon,  
Courthouse, Canyon City, Oregon 97820