

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: *

The original corner was established in 1882 by Henry W. Cooke under Contract No. 427 dated December 15, 1881. The original notes state:

DIAGRAM
T17S R28E
S25
1/4---
S36

Set a basalt stone 24x14x8 ins 18 ins in ground for 1/4 sec cor marked 1/4 on N face from which
A pine 36 ins dia bears N 68° W 80 lks dist marked 1/4SBT.
No other trees within limits and raised a mound of stone alongside.

Description of corner evidence found:

Found a 31x13x9" (24x14x8") stone, 1/4 on the North face, in a mound of stone.
The roothole of a windfall P.Pine scribed 1/4SBT, bears N 77½° W, 54.6 ft.

Description of monument and accessories I establish to perpetuate the original location of this corner:


Set a 2½ x 28" aluminum monument 22" in the ground in a mound of stone and buried the original stone on the East side.
I establish new bearing trees:
A 6" P.Pine bears N 36¼° W, 13.9 ft, scribed 1/4S25BT.
A 10" P.Pine bears S 9¼° E, 20.5 ft, scribed 1/4S36BT.

T17S R28E
S25
1/4---
S36
PLS1918
1988

New BTs have 3/4" brass washers marked PLS1918 attached to the BT blaze, faces and bands painted with red tree marking paint, and BT tags and Attention or Land Survey Monument signs. A steel fence post with Attention or Land Survey Monument sign is driven approximately 3-5 feet from the corner.

Smokey Cadastral Survey, Cont. No. 53-04H1-7-4011
Field Book: FB 3-23
Work accomplished: 5/31/88
Witnesses: Tyler Parsons
 Louise Parsons
 Sharon Parsons
Job No.: 87226

PARSONS SURVEYING
1915 S.E. Stone Street
Corvallis, OR 97333
(503) 752-7515

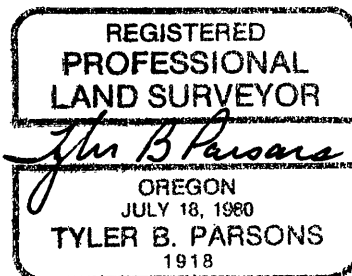

Office of COUNTY SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office for record on the 4 day of Nov, 19 88

Robert D. Buzza by _____
(COUNTY OFFICIAL) (DEPUTY)