


CORNER RESTORATION

S.E. cor.
CORNER Sec. 33 **TWP** 17 S. **RANGE** 28 E.

ORIGINAL SURVEY BY: BAMFORD ROBB

CONTRACT NUMBER: 366

CONTRACT DATE: Jan. 31, 1881

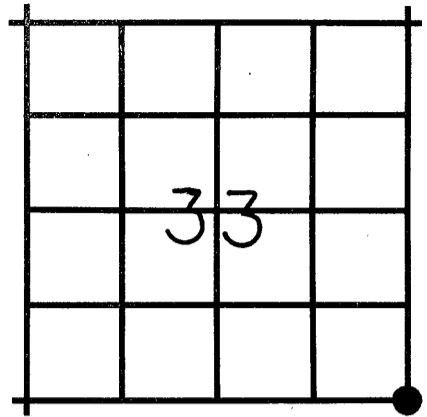

ORIGINAL DESCRIPTION: G.L.O. RECORD: East on True Line on South Boundary Section 33, 80.00 chains set stone 12x10x6 ins. in a mound of stone.

RESTORATION BY, STAMP AND DATE:

R. D. Bagett
 J. L. Watson

Feb. 29, 1984

REGISTERED
 PROFESSIONAL
 LAND SURVEYOR

Robert D. Bagett
 OREGON
 JULY 12, 1983
 ROBERT D. BAGETT
 598

RECEIVED AND
 FILED

MAR 12 1984

OFFICE OF COUNTY SURVEYOR

Robert D. Bagett
 Attest: *Carol Vajnt, Clerk*
 Grant County Surveyor

EVIDENCE FOUND: I found a basalt stone 9"x6"x5" marked with 3 grooves on East and 6 grooves on South, firmly set in a mound of stone. The BLM found this corner in 1961 and set a steel fence post in the mound with attached location tag. I accept the position of this stone for the section corner.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

In place of the corner stone, I set a 1½"x30" galvanized iron pipe 28 inches in the ground with brass cap marked as shown: from which I scribe NEW BEARING TREES:

- A Juniper, 8 ins. diam., bears N. 31° E., 99.4 feet, mkd. T17SR28ES34 CSBT.
- A Juniper 13 ins. diam., bears N. 72° W., 48.0 feet, mkd. T17SR28ES33 CSBT.
- A Juniper 8 ins. diam., bears S. 70° W., 114.6 feet, mkd. T18SR28ES4 CSBT.

Buried original stone South and alongside the iron pipe, and surrounded pipe with a mound of stone, 3 ft. base. Used magnetic compass with 20° E. variation and steel tape measuring to the head of a 40d nail driven flush with the BT blaze at the root crown of the BT's. Attached Grant County Surveyor BT tags to BT's and painted scribing blazes with red timber marking paint. This corner is about 150 feet North of the North Bank of the South Fork John Day River.

MONUMENT MARKED

