


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Corner # A-23

History of original corner establishment:

Original corner established by G.L.O. contract in 1880. Set post with pits for 1/4 corner.

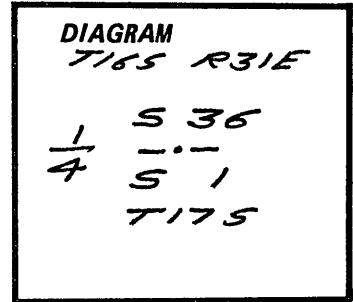

Description of corner evidence found:

Searched for and not found.

Established corner position by single proportion.

Description of monument and accessories | established to perpetuate the original location of this corner:

Set 2 1/2" x 30" Aluminum pipe with 3" Aluminum cap rising 4" in stone collar.

Cap marked

As witnesses:

A 22" Ponderosa Pine bears N13 1/2° E 121.0' marked 1/4 S 36 BT.

T165 R31E


A 16" Ponderosa Pine bears S38 1/2° E 79.4' marked 1/4 S 1 BT.

1/4 S 36
S 1
T175


Attached signs 54-3 & 54-9 to BTs, painted red bands around each BT and nailed brass disc, marked LS 1020, to BT blazes.

1986
LS 1020

I hereby certify the above corner point was established as described in November, 1986.

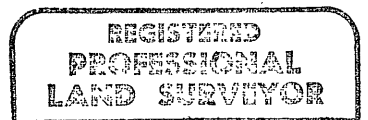

Office of Surveyor County of Grant
 State of Oregon, I hereby certify that the within instrument was filed in this office
 for record on the 12 day of Mar, 1987
Robert D. Baggett by _____
 (COUNTY OFFICIAL) (DEPUTY)

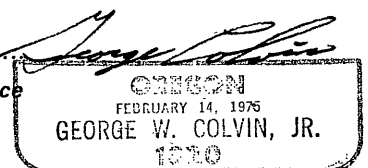

See Mos 981