


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

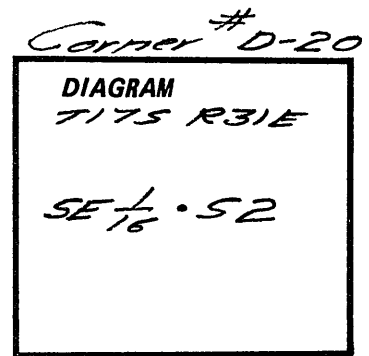

Description of corner evidence found:

Description of monument and accessories | established to perpetuate the original location of this corner:

Set 2 1/2" x 30" aluminum pipe with 3" aluminum cap rising 10" in stone mound.

Cap marked

As witnesses:

A 8" Ponderosa Pine bears S 27 1/2° E 76.4' marked SE 1/16 52 BT

SE 1/16

A 12" Juniper bears N 76° E 55.7' marked SE 1/16 52 BT


52

1986

LS 1020

Attached signs 54-3 & 54-9 to BTs; painted a red band around each and nailed brass discs marked LS 1020 to BT blazes.

I hereby certify the above corner point was established as described in November, 1986.

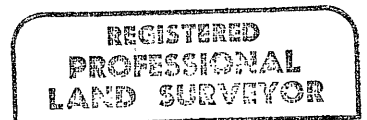

Office of Surveyor County of Grant
 State of Oregon, I hereby certify that the within instrument was filed in this office
 for record on the 12 day of Mar, 1987
Robert D. Bryant by _____
 (COUNTY OFFICIAL) (DEPUTY)

