

RECORD OF LAND CORNER MONUMENTATION


CORNER: SE Cor. Sec. 13, T.17S., R.31E., W.M.

ORIGINAL SURVEY BY: Henry W. Cooke

CONTRACT NUMBER: 494

CONTRACT DATE: January 16, 1884

SUBSEQUENT SURVEY: Scott R. McIntyre 1979



ORIGINAL G.L.O. DESCRIPTION: Set a basalt stone 16x10x7 ins., 10 ins. in the ground for cor. to secs. 13, 18, 19 & 24. Marked with 3 notches on the N. & S. edges. From which: A pine 48 ins. dia. bears N65°E., 130 lks. dist. marked T17S R32E., S18 BT. A pine 40 ins. dia. bears S5°E., 150 lks. dist. marked T17S R32E S19 B.T. A pine 10 ins. dia. bears S10°W., 186 lks. dist. marked T17S R31E S24 B.T. A pine 50 ins. dia. bears N55°W., 187 lks. dist. marked T17S R31E S13 B.T.

1979 RESURVEY BY SCOTT R. MCINTYRE, CADASTRAL SURVEYOR UNDER SPECIAL INSTRUCTIONS DATED 05/21/1979 (Pg. 351-352): SEE RECORD MAP OF SURVEY NO. 752.

The cor. of secs. 13, 18, 19, and 24, monumented with the original basalt stone, 16 x 10 x 7 ins., firmly set 8 ins. in the ground, mkd. with 3 notches on N. and S. edges, from which the remains of the original bearing trees:

A pine, 52 ins. diam., bears N. 65° E., 130 lks. dist., with scribe marks T17S R32E S18 BT visible on partially healed blaze.

A pine, 44 ins. diam., bears S. 5° E., 150 lks. dist., with scribe marks T17S R32E S19 BT visible on partially healed blaze.

A pine, 14 ins. diam., bears S. 10° W., 186 lks. dist., with scribe marks T17S R31E S24 BT visible on partially healed blaze.

A pine snag, 55 ins. diam., bears N. 55° W., 187 lks. dist., with scribe marks T17S R31E S13 BT visible on weathered blaze.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 21 ins. in the ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd.

T 17 S	
R 31 E	R 32 E
S 13	S 18
S 24	S 19
1979	

from which a new bearing tree

A pine, 14 ins. diam., bears N. 18° W., 57 lks. dist., mkd. T17S R31E S13 BT.

EVIDENCE FOUND:

None. No field visit was made for this Corner Restoration Report, it has been prepared from record General Land Office and Bureau of Land Management field notes. See Record Map of Survey 752 filed in the Grant County Surveyor's Office.

PREPARED BY:


Michael C. Springer, PLS
Grant County Surveyor
Marcus Teague, Technician

217 N. Canyon Blvd.
John Day, OR, 97845
(541) 575-1251

December 23, 2016

RECEIVED AND FILED
GRANT COUNTY SURVEYOR

DEC 27 2016

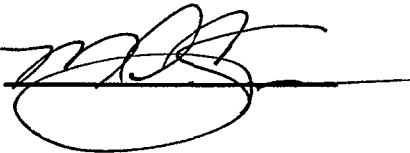BY: 

REGISTERED
PROFESSIONAL
LAND SURVEYOR


OREGON
JULY 9, 2002
MICHAEL C. SPRINGER
#70918

EXPIRES: 6/30/2018