

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original corner established by S. W. Lacklund in May, 1881 under Contract number 384, dated March 29, 1881.


Surveyor General's records state:-

North between secs. 32 & 33

40.00 set stone 15x12x10 in mound of stone for 1/4 sec. cor. from which

a pine 26 in. dia. bears S. 77° W. 5 lks dist.

note: only 1 BT, does not say whether scribed or not.

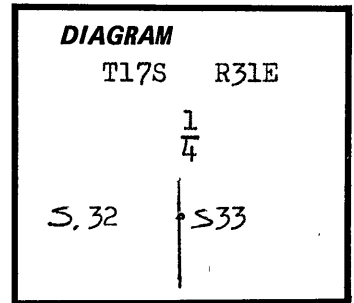

Description of corner evidence found:

At the assumed corner location I found a stone 14x11x7 marked with a 1/4 on the west face in a small mound of stone from which a 30" ponderosa pine bears S. 80° W., 3.8 ft distant. Scribing is barely visible.

Description of monument and accessories | established to perpetuate the original location of this corner:

At the corner location I set a standard U.S.F.S. all aluminum monument consisting of a 3" disk mounted on a 2 1/2 x 30" pipe with a flared base. The disk is stamped as shown.

Monument is buried 18 ins. with 12 ins. above the ground, surrounded by a mound of rock 3 ft in diameter by 10 inches high. Original corner stoned buried alongside. Set 10/22/82, and witnessed by Pedro Zabala and Michael Walker.



New BT established:

a 16" P. pine bears N. 50°20' E., 19.6 ft distant, scribed 1/4 S 33, BT.

Original BT:

a 30" P. pine bears S. 80° W., 3.8 ft distant, scribing barely visible.

Both banded with red paint, carry BT and Attention signs, and new BT has a brass disk stamped PLS 1287 nailed at the base of the BT blaze

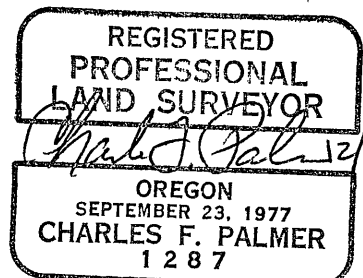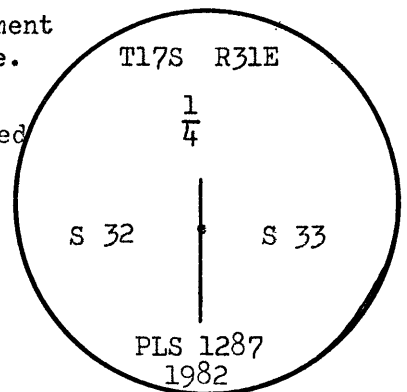

Office of..... Surveyor..... County of..... Grant.....
 State of..... Oregon....., I hereby certify that the within instrument was filed in this office
 for record on the..... 8..... day of..... Mar....., 1983
Robert D. Gault by.....
 (COUNTY OFFICIAL) (DEPUTY)