


CERTIFIED RECORD OF LAND CORNER MONUMENTATION.

History of original corner establishment:
Not previously established.

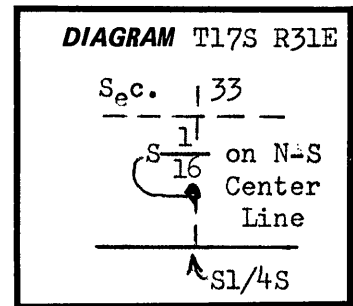

Description of corner evidence found:

Description of monument and accessories I established to perpetuate the original location of this corner:



I set a standard U.S.F.S. all aluminum monument consisting of a 3" disk mounted on a 2 1/2 x 30" pipe with a flared base. The disk is stamped as shown.

On 10/22/82 I buried the monument 16" with 4" protruding above the ground, surrounded by a small mound of rock. Witnessed by Pedro Zabala and Michael Walker. The mound of rock is 12" in height by 3 ft in diameter.

BT's:

- A 32" P. pine bears N. 50° E, 96.4 ft distant, scribed S 1/16 S 33 BT
- a 28" P. pine bears N. 53° 20' W., 80.3 ft distant, scribed S 1/16 S 33 BT.

Both banded with red paint, carry BT and Attention signs and have brass disks stamped PLS 1287 nailed at the bases of the BT blazes

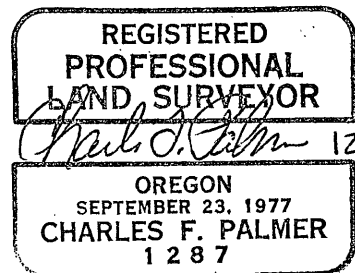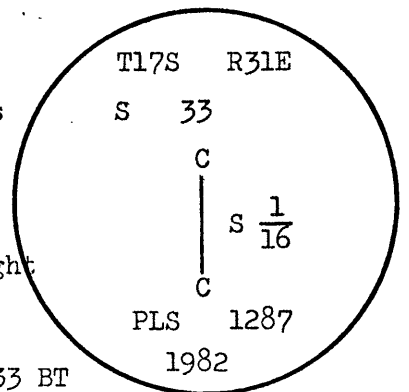

Office of.....Surveyor..... County of.....Grant.....
State of.....Oregon....., I hereby certify that the within instrument was filed in this office
for record on the.....8..... day of.....March....., 1983
by.....Robert D. Buzza.....
(COUNTY OFFICIAL) (DEPUTY)