


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Not previously established.

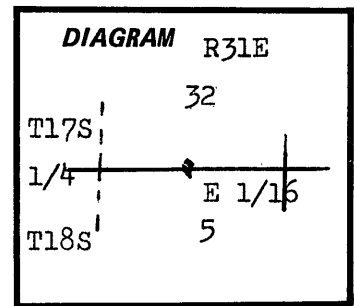

Description of corner evidence found:

None

Description of monument and accessories | established to perpetuate the original location of this corner:

At the location of the corner I set a standard U.S.F.S. all aluminum monument consisting of a 3" disk mounted on a 2 1/2 x 30" pipe with a flared base. Disk is stamped as shown.



Monument buried 24 inches with 6 inches protruding above the ground. Witnessed by Pedro Zabala and Michael Walker. Set 10/22/82.

BT's established:

a 19" p. pine bears S. 63° W. 15.8 ft distant, scribed E 1/16, S. 5, BT.

a 16" p. pine bears N. 50° W., 60.8 ft distant, scribed E 1/16 S 32 BT.

Both banded with red paint, carry BT and Attention signs, and have brass disks stamped PLS 1287 nailed at the bases of the BT blazes.

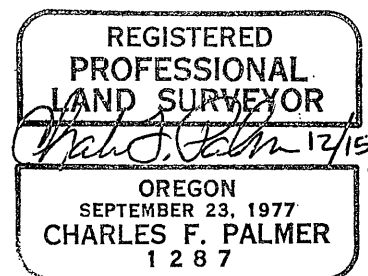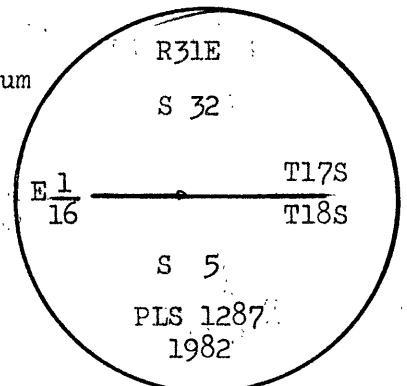

Office of.....Surveyor.....County of.....Grant.....
 State of.....Oregon....., I hereby certify that the within instrument was filed in this office
 for record on the.....8..... day of.....mar....., 19.....83.....
 _____ by _____
 (COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

☆ GPO—798-276

Grant County Survey No. *739*