

CERTIFIED RECORD OF LAND CORNER MONUMENTATION.

History of original corner establishment:


Original corner established by S. W. Lacklund in May, 1881 under contract number 384, dated March 29, 1881.

Surveyor General's records state:-

East on South boundary of Sec. 33

40.00 Set basalt stone 14x7x6 in mound of stone for 1/4 sec. cor.

note:- no BT's set




Description of corner evidence found:

I found a stone 12x6x3 marked with a 1/4 on the north face.

Description of monument and accessories I established to perpetuate the original location of this corner:


At the corner location I set a standard U.S.F.S. all aluminum monument consisting of a 3" disk mounted on a 2 1/2 x 30" pipe with a flared base. Disk is stamped as shown. Marked Rock alongside.
10/21/82 monument buried 24 inches, with 6 inches protruding above the ground, witnessed by Pedro Zabala and Michael Walker.

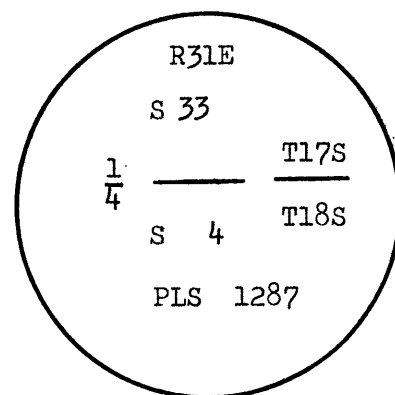

BT established:

A 11" P. pine bears S. 40° W., 108.4 ft distant, scribed 1/4 S 4, BT

Banded with red paint, carries a BT and Attention sing, and has a brass disk stamped PLS 1287 nailed at the base of the BT blaze.

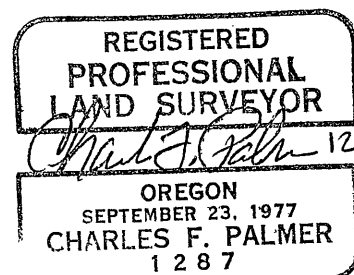

Office of.....Surveyor..... County of...Grant.....
State of.....Oregon....., I hereby certify that the within instrument was filed in this office
for record on the.....8..... day of.....March....., 1983
Robert F. Rogers by..... (DEPUTY)