

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

160

History of original corner establishment:


Corner established in 1884 by Henry W. Cooke under General Land Office contract #494

Surveyor General record states;

Set post for 1/4 sec. cor. from which;

A Pine 12 ins. diam. bears S20W, 16 lks.

A Pine 20 ins. diam. bears N12E, 65 lks.

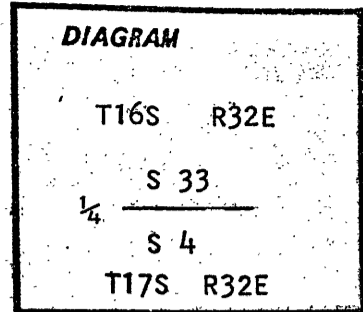

No record of subsequent remonumentation was found in the County records

Description of corner evidence found:

Found both BTs

See map of survey dated October 1981

Description of monument and accessories established to perpetuate the original location of this corner:

At record distances from BTs I set a 2 1/2 x 30 inch aluminum pipe with aluminum cap marked as shown 28 inches in the ground from which;


ORIGINAL BTs

A 20 inch P. Pine bears N12E, 42.9 feet, dead and down, scribes visible

A 14 inch P. Pine bears S20W, 10.6 feet, live and vigorous, blaze evident, did not open

NEW BT

A 36 inch P. Pine bears N20W, 73.0 feet, marked 1/4 S33 BT

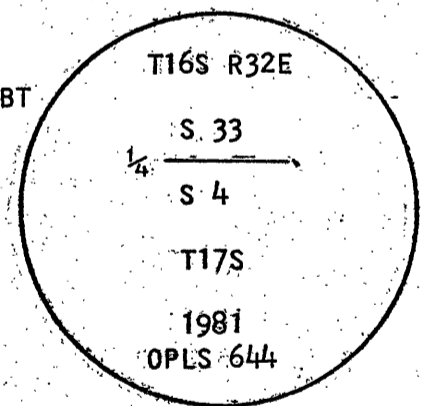

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Handwritten signature of Duane I. Griffith

OREGON
JULY 10, 1966
DUANE I. GRIFFITH
644

Date, September 10, 1981.

Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 21° East declination in the establishment of accessories. Original BTs measured to face of blaze. New BTs measured to center of tree.

Office of Surveyor County of Grant

State of Oregon, I hereby certify that the within instrument was filed in this office

for record on the 23 day of Dec, 1981

Robert D. Bayne by _____

(COUNTY OFFICIAL)

(DEPUTY)