

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

3

**History of original corner establishment:**


Corner established in 1883 by Henry W. Cooke under General Land Office contract #470

Surveyor General record states;

Set post for 1/4 Sec. cor. from which;

A Pine 16 ins. diam. bears N18W, 54 lks.

A Pine 14 ins. diam. bears N30E, 60 lks.

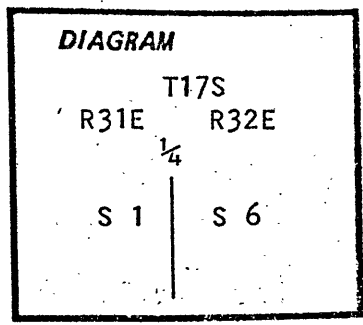

No record of subsequent remonumentation was found in County records  
**Description of corner evidence found:**

Found both BTs

See map of survey dated October, 1981  
**Description of monument and accessories established to perpetuate the original location of this corner:**

At record distances from BTs I set a 2 1/2 x 30 inch aluminum pipe with aluminum cap marked as shown 28 inches in the ground, from which;


**ORIGINAL BTs**

A 30 inch P.Pine bears N30E, 39.6 feet, live and vigorous, scribes visible!

A 20 inch+ P.Pine stump bears N14W, 35.6 feet, scribes visible

**NEW BT**

A 30 inch P.Pine bears N34W, 40.7 feet marked 1/4 S1 BT

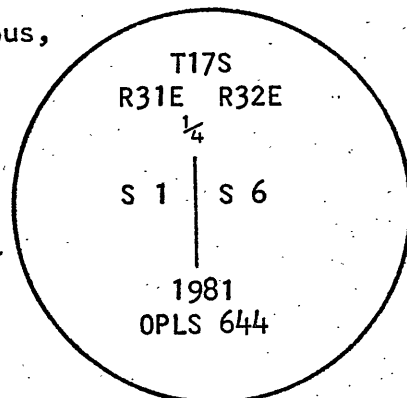

**REGISTERED PROFESSIONAL LAND SURVEYOR**

OREGON  
JULY 10, 1964  
**DUANE I. GRIFFITH**  
644

Date, September 25, 1981

Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination in the establishment of accessories. Original BTs measured to face of blaze. New BTs measured to center of tree.

Office of Surveyor County of Grant  
State of Oregon, I hereby certify that the within instrument was filed in this office for record on the 23 day of Dec, 1981  
Robert D. Baggett by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)

C-1  
26