

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

55


History of original corner establishment:

Corner established in 1884 by Henry W. Cooke under General Land Office contract #494

Surveyor General record states;

Set basalt stone 20x12x12 for 1/4 sec.cor. marked 1/4 on W. face from which;

- A Pine 40 ins. diam. bears S63W, 61 lks.
- A Pine 38 ins. diam. bears N48E, 36 lks.

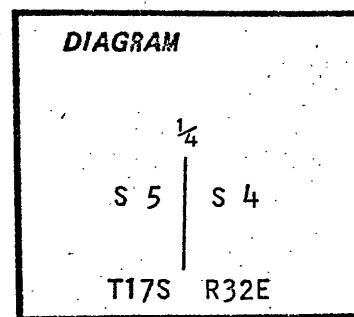

No record of subsequent remonumentation was found in the County records

Description of corner evidence found:

Found stone 20x12x12 marked 1/4 and 1 BT. A 40 inch+ P.Pine lays Southwest 50 feet+ and has been pushed out of a skid trail. No scribes found

See map of survey dated October 1981

Description of monument and accessories I established to perpetuate the original location of this corner:

In place of stone I set a 2 1/2 x 30 inch aluminum pipe with aluminum cap marked as shown 28 inches in the ground, from which;

ORIGINAL BT


A 30 inch+ badly rotted P.Pine stump bears N38E, 31.0 feet, no scribes found

NEW BTs

- A 12 inch red fir bears S54E, 31.5 feet marked 1/4 S4 BT
- A 14 inch red fir bears S73W, 35.0 feet marked 1/4 S5 BT

Buried stone South and alongside of pipe

Raised mound of stone

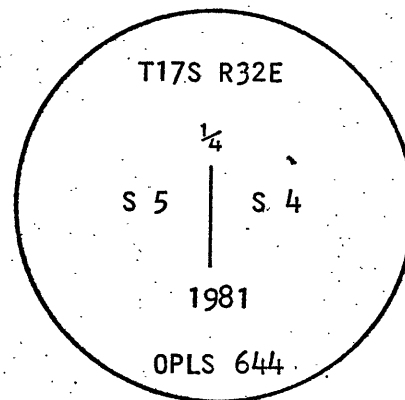

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

Date, September, 15, 1981

Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 21° East declination in the establishment of accessories. Original BTs measured to face of blaze. New BTs measured to center of tree.

Office of..... *Surveyor* County of..... *Grant*

State of..... *Oregon*, I hereby certify that the within instrument was filed in this office for record on the..... *23* day of..... *Dec*, 19*81*.....

Robert D. Baggett by (COUNTY OFFICIAL) (DEPUTY)