

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


(83)

History of original corner establishment:

Corner established in 1884 by Henry W. Cooke under General Land Office contract #494

Surveyor General record states;

Set basalt stone 16x14x7 for 1/4 sec. cor. marked 1/4 on W. face. Dug pits and raised mound of earth 1 1/2 ft. high and 3 1/2 ft. base alongside.

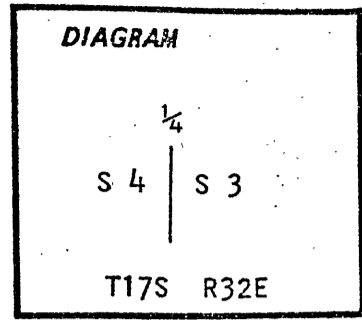

No record of subsequent remonumentation was found in the County records

Description of corner evidence found:

Area falls in meadow and also an old road runs along search area No stone was found.

See map of survey dated October 1981


Description of monument and accessories I established to perpetuate the original location of this corner:

At proportionate distance I set a 2 1/2 x 30 inch aluminum pipe with aluminum cap marked as shown 28 inches in the ground from which;

NEW BTs

A 14 inch P.Pine bears S78W, 197.1 feet, marked 1/4 S4 BT

A 20 inch P.Pine bears S70E, 259.0 feet, marked 1/4 S3 BT

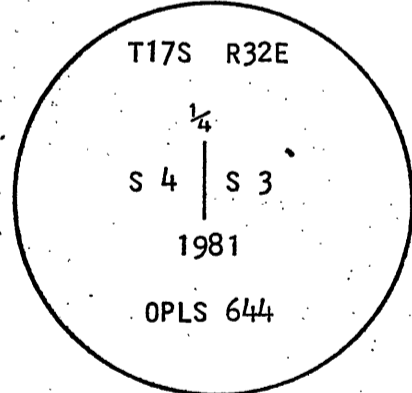

REGISTERED PROFESSIONAL LAND SURVEYOR

Handwritten signature

OREGON JULY 10, 1964 DUANE I. GRIFFITH 644

Date, October 8, 1981.

Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 21° East declination in the establishment of accessories. Original BTs measured to face of blaze. New BTs measured to center of tree.

Office of *Surveyor* County of *Grant*
State of *Oregon*, I hereby certify that the within instrument was filed in this office for record on the *23* day of *Dec*, 19*81*
Robert D. Griffith by *[Signature]*
(COUNTY OFFICIAL) (DEPUTY)