

①
11


History of original corner establishment:

Corner established in 1883 by Henry W. Cooke under General Land Office contract #470.

Surveyor General record states;

Set post and marked stone for Sec. cor. from which,

- A Pine 40 ins. diam. bears N82E, 95 lks
- A Pine 36 ins. diam. bears S83E, 136 lks

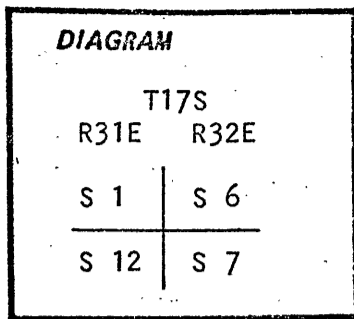

No record of subsequent remonumentation was found in County records
Description of corner evidence found:

Found small mound of stone and 2 BTs

See map of survey dated October, 1981
Description of monument and accessories established to perpetuate the original location of this corner:


At record distances from BTs I set a 2½ x 30 inch aluminum pipe with aluminum cap marked as shown, 25 inches in the ground, from which;

ORIGINAL BTs:

- A 34 inch P.Pine bears N89E, 62.7 feet, live and vigorous, scribes visible
- A 35 inch P.Pine bears S76E, 89.8 feet, live and vigorous, Scribes visible

NEW BTs

- A 12 inch P.Pine bears S34W, 37.3 feet, marked T17S R31E S12 BT
- A 12 inch P.Pine bears N81W, 52.4 feet, marked T17S R31E S1 BT

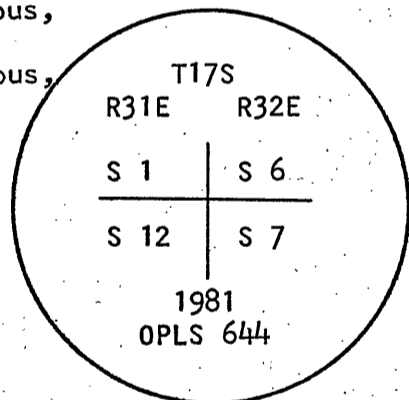

Raised small mound of stone

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Handwritten signature of Duane I. Griffith

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

Date, September 25, 1981

Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination in the establishment of accessories. Original BTs measured to face of blaze. New BTs measured to center of tree.

Office of... *Surveyor* ... County of... *Grant* ...
 State of... *Oregon* ... I hereby certify that the within instrument was filed in this office
 for record on the... *23* day of... *Dec* ... 1981
Robert D. Light by ...
 (COUNTY OFFICIAL) (DEPUTY)