

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


66  
11

**History of original corner establishment:**

Corner established in 1884 by Henry W. Cooke under General Land Office contract #494

Surveyor General record states;

Set basalt stone 14x10x8 for 1/4 sec.cor. marked 1/4 on the N. face. Raised mound of stone 1 1/2 ft. high and 3 1/2 ft. at the base alongside

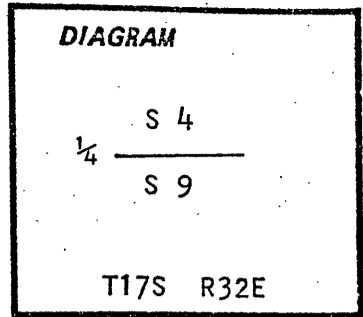

No record of subsequent remonumentation was found in the County records

**Description of corner evidence found:**

NONE--Corner point lands in road fill

See map of survey dated October 1981


**Description of monument and accessories I established to perpetuate the original location of this corner:**

At proportionate distance I set a 2 1/2 x 30 inch aluminum pipe with aluminum cap marked as shown 24 inches in the ground, from which;

NEW BT

A 15 inch P.Pine bears N25E, 148.7 feet, marked 1/4 S4 BT

Raised mound of stone 4 ft. at the base to top of cap

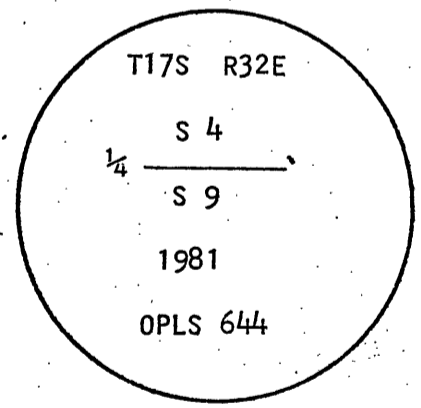

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Duane I. Griffith*  
OREGON  
JULY 10, 1954  
DUANE I. GRIFFITH  
644

Date, October 2, 1981 . . .

Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 21° East declination in the establishment of accessories. Original BTs measured to face of blaze. New BTs measured to center of tree.

Office of *Sumner* County of *Grant*  
State of *Oregon* I hereby certify that the within instrument was filed in this office  
for record on the *23* day of *Dec*, 19*81*  
*Robert D. Budget* by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)