


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

12
20

History of original corner establishment:

Corner not established in original survey

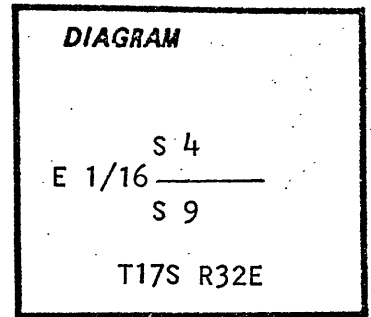

No record of subsequent monumentation found in County records
Description of corner evidence found:

NONE

See survey dated October, 1981
Description of monument and accessories established to perpetuate the original location of this corner:


At corner point I set a 2 1/2 x 30 inch aluminum pipe with aluminum cap marked as shown 12 inches in the ground from which;

NEW BTs

A 16 inch P.Pine bears S13W, 25.8 feet marked E1/16 S9 BT

A 20 inch P.Pine bears N61W, 80.9 feet marked E1/16 S4 BT

Raised mound of stone 4 ft. at the base to top of cap

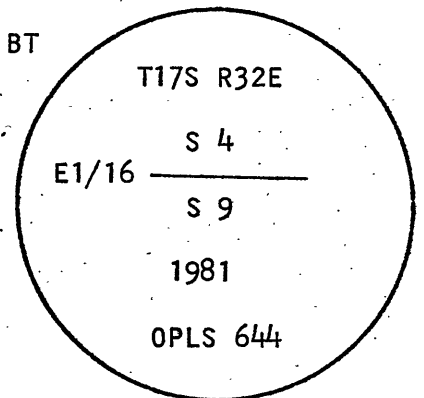

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Handwritten signature of Duane I. Griffith

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

Date, October 3, 1981.
Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination in the establishment of accessories. New BTs measured to center of tree.

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office for record on the 23 day of Dec, 1981
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)

45 E-12