

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

10


History of original corner establishment:

Corner established in 1883 by Henry W. Cooke under General Land Office contract #470

Surveyor General record states;

Set post for 1/4 Sec. cor. from which;

- A Pine 24 ins. diam. bears N10E, 65 lks
- A Pine 40 ins. diam. bears S60W, 53 lks

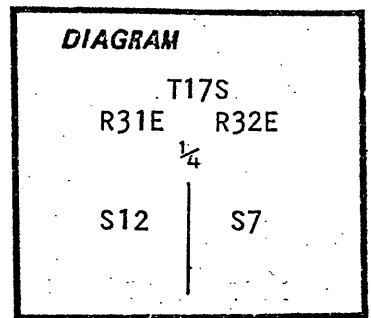

No record of subsequent remonumentation was found in County records
Description of corner evidence found:

Found both BTs

See map of survey dated October, 1981
Description of monument and accessories established to perpetuate the original location of this corner:


At record distances from BTs I set a 2 1/2 x 30 inch aluminum pipe with aluminum cap marked as shown 29 inches in the ground, from which;

ORIGINAL BTs

- A 32 inch + P. Pine stump bears S65W, 35.0 feet, scribes visible
- A 30 inch+ P. Pine stump bears N12E, 42.9 feet, Scribes visible

NEW BTs

- A 12 inch red fir bears S86E, 26.0 feet marked 1/4 S7 BT
- A 14 inch red fir bears S73W, 5.2 feet, marked 1/4 S12 BT

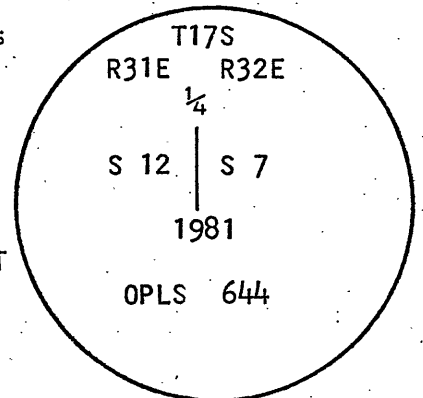

REGISTERED PROFESSIONAL LAND SURVEYOR

Robert D. DeGoo
OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

Date, September 25, 1981.

Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination in the establishment of accessories. Original BTs measured to face of blaze. New BTs measured to center of tree.

Office of... *Surveyor* ... County of... *Grant* ...
State of... *Oregon* ... I hereby certify that the within instrument was filed in this office for record on the... *23* day of... *Dec* ... 19... *81*
Robert D. DeGoo by ...
(COUNTY OFFICIAL) (DEPUTY)

6-1
25