

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

(63)
7


History of original corner establishment:

Corner established in 1884 by Henry W. Cooke under General Land Office contract #494.

Surveyor General record states;

Set basalt stone 16x13x9 ins. for 1/4 sec.cor. marked 1/4 on W face from which;

- A Pine 44 ins. diam. bears S20E, 255 lks.
- A Pine 12 ins. diam. bears S19W, 227 lks.

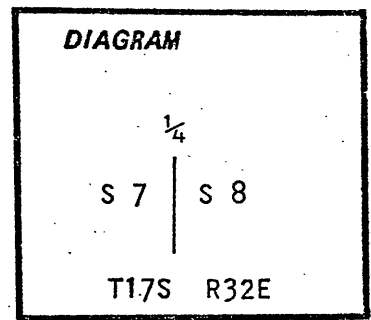

No record of subsequent remonumentation was found in the County records

Description of corner evidence found:

Found marked stone of call size and 2 BTs

See map of survey dated October 1981

Description of monument and accessories, established to perpetuate the original location of this corner:

In place of stone I set a 2 1/2 x 30 inch aluminum pipe with aluminum cap marked as shown 20 inches in the ground from which;

ORIGINAL BTs


- A 48 inch P.Pine stump bears S5E, 169 feet, blaze evident, did not open
- A 20 inch P.Pine bears S13W, 150.0 feet, live and vigorous, blaze evident, did not open

NEW BT

A 10 inch P.Pine bears S59E, 28.8 feet, marked 1/4 S8 BT

Buried stone North and alongside of pipe

Raised mound of stone

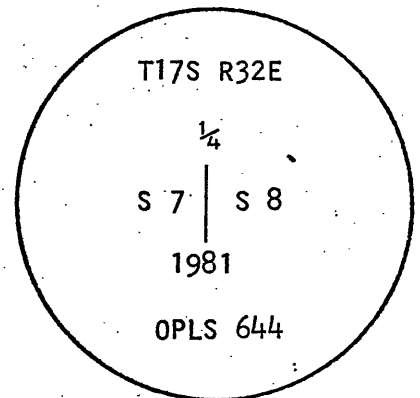

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

Date. September 15, 1981

Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 21° East declination in the establishment of accessories. Original BTs measured to face of blaze. New BTs measured to center of tree.

Office of Surveyor County of Juab

State of Oregon, I hereby certify that the within instrument was filed in this office

for record on the 23 day of Dec, 1981.

Robert W. Dwyer by _____

(COUNTY OFFICIAL)

(DEPUTY)