


History of original corner establishment:

Corner not established in original survey

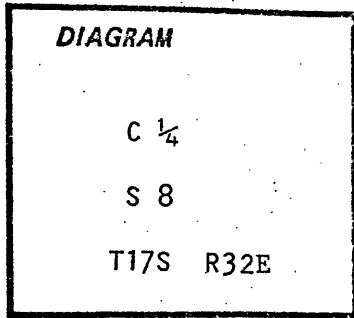

No record of subsequent monumentation found in County records  
Description of corner evidence found:


NONE

See survey dated October, 1981  
Description of monument and accessories I established to perpetuate the original location of this corner:

At corner point I set a 2½ x 30 inch aluminum pipe with aluminum cap marked as shown 29 inches in the ground from which:

NEW BTs

- A 16 inch P.Pine bears S22E, 5.3 feet marked C¼ S8 BT
- A 16 inch P.Pine bears S82W, 16.0 feet marked X BT

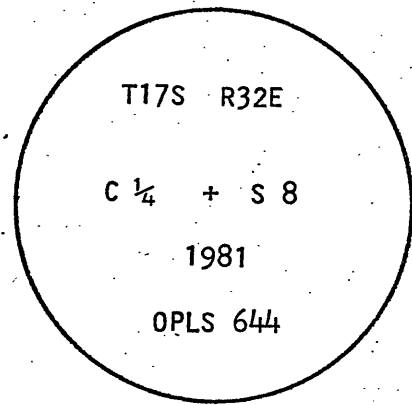

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

OREGON  
JULY 10, 1964  
DUANE I. GRIFFITH  
644

Date, October 2, 1981.  
Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination in the establishment of accessories. New BTs measured to center of tree.

Office of Sumner County of Grant  
State of Oregon, I hereby certify that the within instrument was filed in this office for record on the 23 day of Dec, 1981  
Harold D. Goff by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)