(53)

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

DIAGRAM



Corner established in 1884 by Henry W. Cooke under General Land Office contract #494

Surveyor General record states;

Set basalt stone 20x18x16 for 1/4 sec.cor. marked 1/4 on W. face from which:

A Pine 48 ins. diam. bears N88W, 91 lks.

A Pine 40 ins. diam. bears S70E, 258 lks.

No record of subsequent remonumentation was found in the County records

Description of corner evidence found:

Found marked stone, call size and 2 BTs

See map of survey dated October 1981

Description of monument and accessories I established to perpetuate the original location of this corner:

In place of stone I set a 2½ x 30 inch aluminum pipe with aluminum cap marked as shown, 18 inches in the ground, from which;

ORIGINAL BTs
A 48 inch P.Pine bears S70E, 171.0 feet, scribes visible, live and vigorous
A 54 inch P.Pine bears S89W, 61.0 feet, blaze evident, did not open
Live, not vigorous

NEW BT
A 14 inch P.Pine bears S4W, 55.4 feet, marked 1/4 S8 BT

Buried stone East and alongside pipe

Raised mound of stone 4 ft. at the base to the top of cap

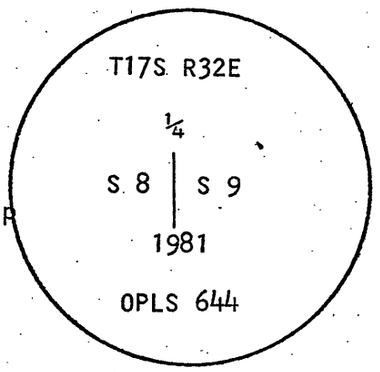

REGISTERED PROFESSIONAL LAND SURVEYOR
OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

Date. September 10, 1981.
Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 21° East declination in the establishment of accessories. Original BTs measured to face of blaze. New BTs measured to center of tree.

Office of Surveyor *County of* Grant
State of Oregon. *I hereby certify that the within instrument was filed in this office for record on the* 23 *day of* Dec, *19* 81
Robert D. Engelt *by* .....
(COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

☆GPO—798-276

G-9